


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00385	Connector, dc plug, 2.35x0.7xL19.3 mm, EIAJ-1, molding style, spring contacts, yellow insulator	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC	1	
3	24-00047	Overmold, PVC	1	black

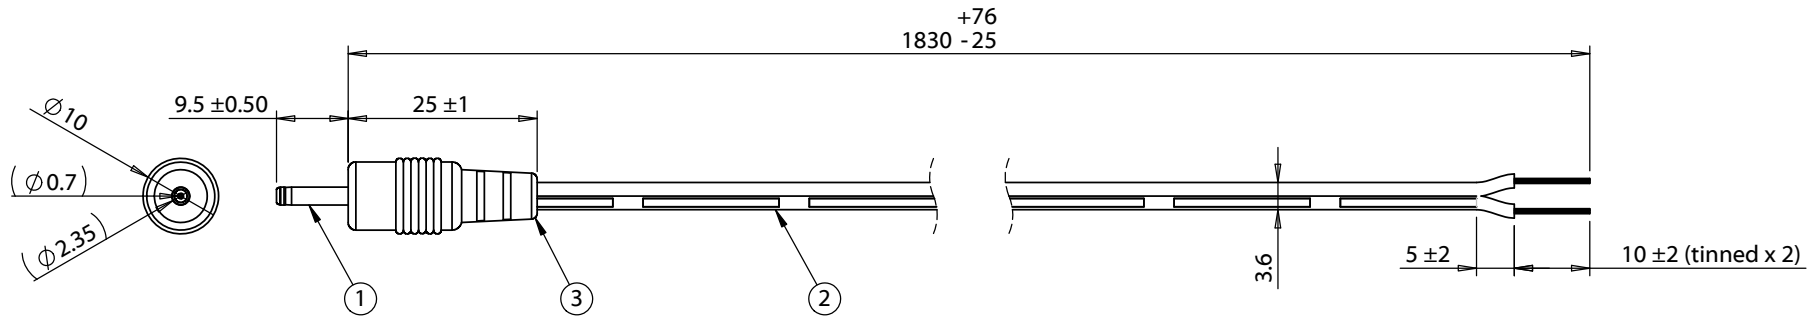

Notes:

Electical requirement: 3.0 A, 48 Vdc

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00385	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> <p>Size: A Part number: 053-0191R (CA-2192)</p> <p>Scale: 1:1 Sheet 1 of 1</p>
A1	10/12/2009	Added overmold dimensions; insulator color corrected		RoHS compliant	
A2	8/31/2011	Updated description, connector, and wire information	Verified:	Function test: no open, no short circuit, no intermittent	
A3	6/14/2012	Updated connector description	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 2.35x0.7x9.5 mm, 50-00385 dc plug to stripped tinned, 24 AWG, 30-00003 wire	
A4	12/9/2016	Corrected tolerance typo			
A5	6/17/2022	Connector updated to 50-00385			

5

4

3

2

1