

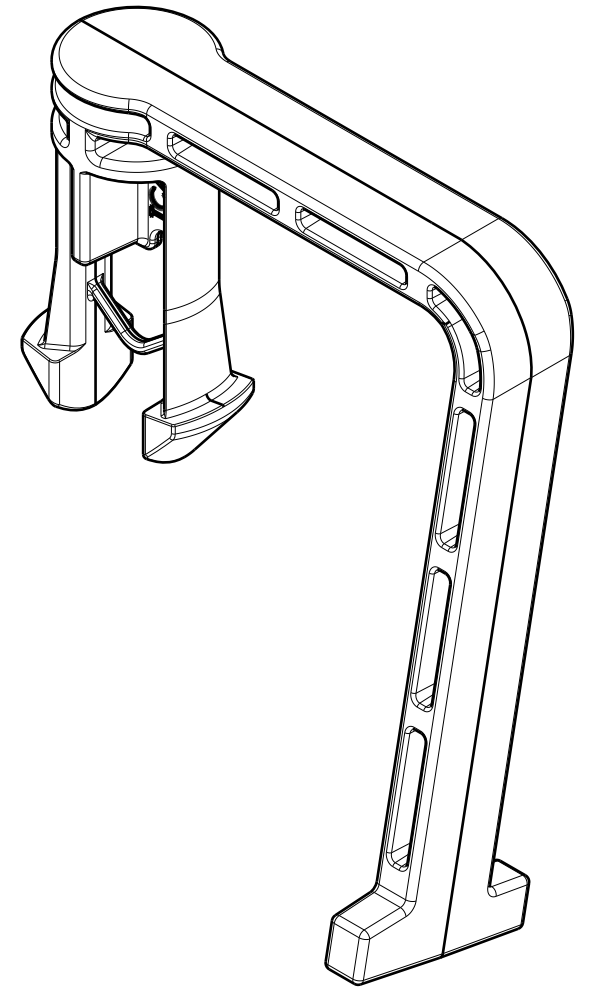


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
03.1	Design Release		SEE ECN# 015164	NHK	05/23/19	HDC	05/23/19

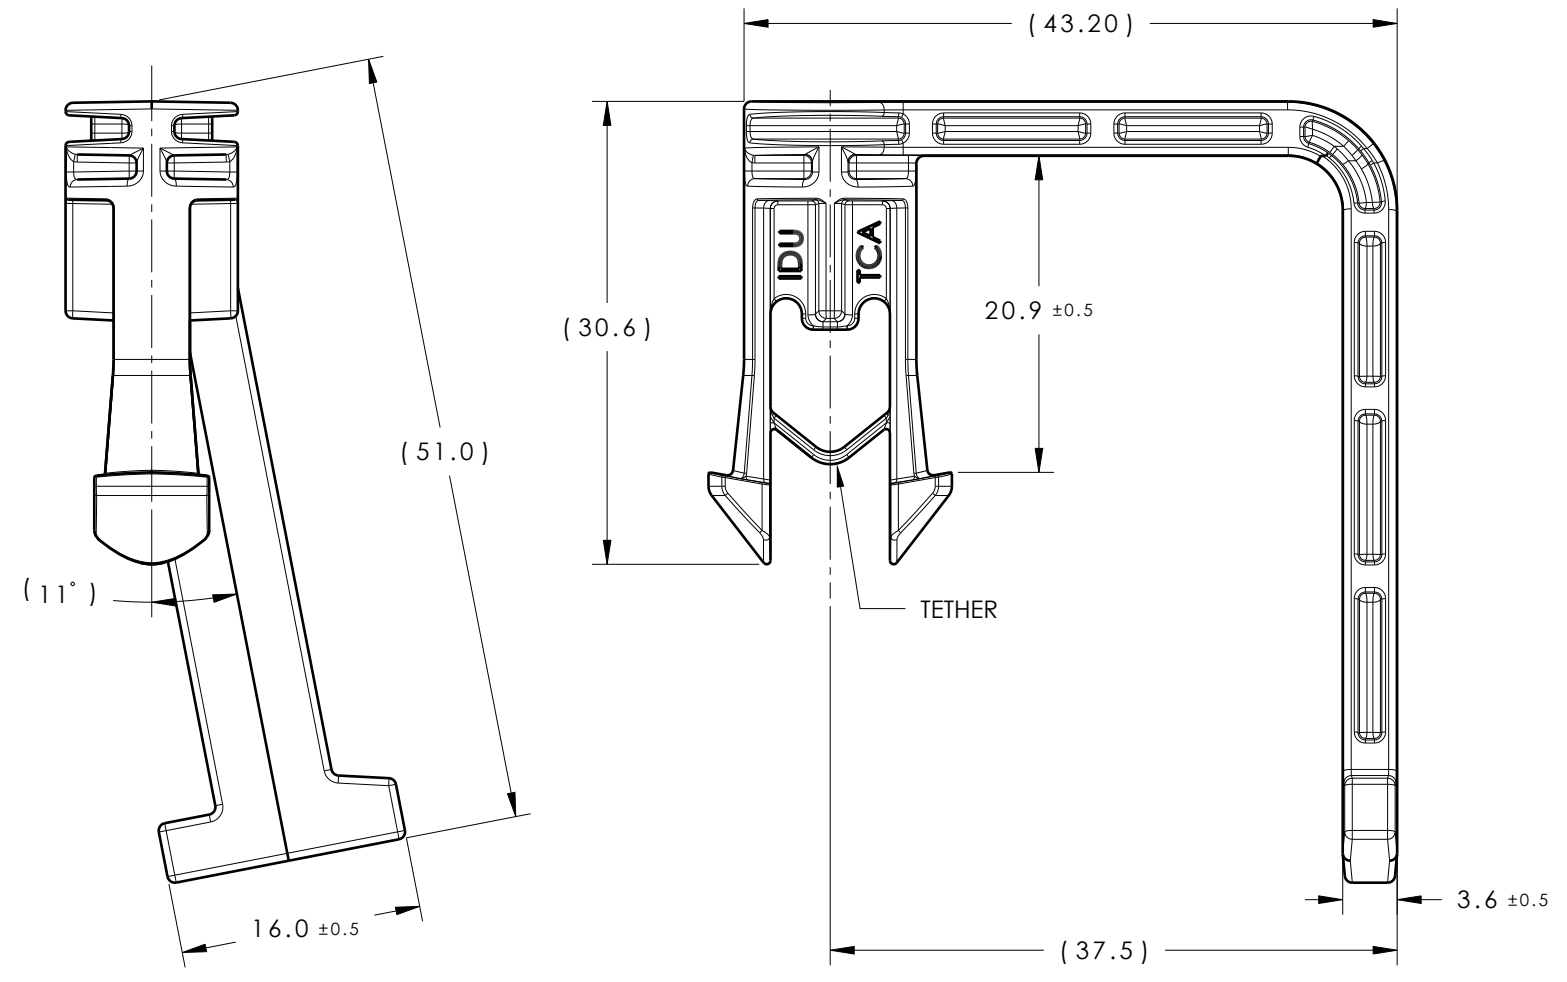

ISOMETRIC VIEW

- REFERENCE:
 PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
1. MOUNT PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN THE APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 14.25mm.
 2. MOUNT PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN THE APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 14.25mm.
 3. SHEET METAL THICKNESS RANGE: 13.5mm - 15.0mm
 4. APPLICABLE HOLE SIZE:
 - A. 12.35mm +/-0.65
 5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 6. MAX ALLOWABLE FLASH TO BE: 0.25 mm
 7. MAX ALLOWABLE MISMATCH TO BE: 0.1 mm
 8. IF THE TETHER IS FRACTURED THE PART WILL STILL FUNCTION AS INTENDED.
 9. SINK MARKS ARE ACCEPTABLE ON TAPE BAR IF THEY DO NOT AFFECT FIT, FORM, OR FUNCTION.

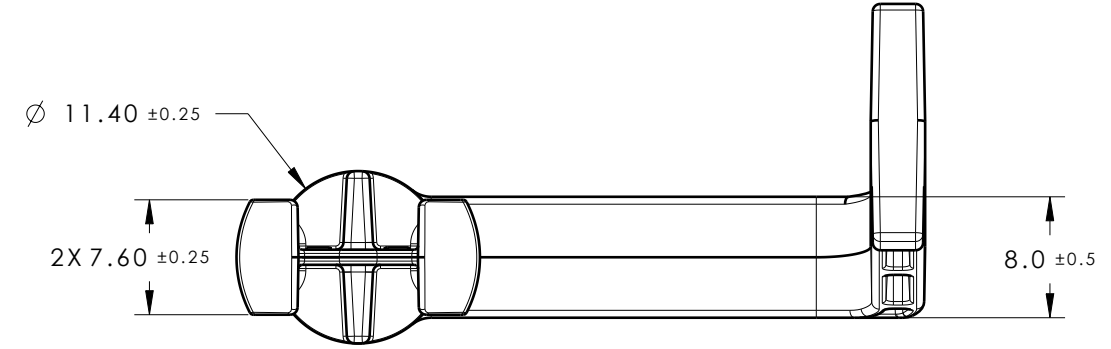

Material	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	RJE	11/07/17	Article/Type-No	BCATC90DEG	Scale	2:1		
			Approved	EJH	11/07/17	Title	TRANSMISSION MOUNT WITH 90 DEG TAPE BAR	Project Number	17-2489		
COLOR: SEE CHART	Tolerance defined on each dimension		<p>North America Email: corp@htamericas.com Web: www.hellermann.tyton.com</p>			Drawing-No	17-2489-001-CSU	PRODUCTION Phase	03.1	Format	B
						Sheet	1/1				