

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 24VAC/DC BU/GN/Y



Part No.:	699.150.75	(C Luca	c UL us	UK
Series:	Kompakt 37	KoHS2		
AAECU A N	ICAL DATA			

MECHANICAL DATA		
Height	209 mm	
Diameter	38 mm	
Materials	PC	
Dome colour	Blue Green Red Yellow	
Housing colour	Black	
Protection category	IP65	
Connection	Cable	
cross-sectional area maximum	0,34mm ² / 22AWG	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Cable length	2000 mm	
Tension relief	Pull-out protection	
Type of fixing	Built-in mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	231 g	
Product weight	191 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	160 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA		
Light source	LED	
Light colour	Blue Green Red Yellow	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

Optical signal image

Acoustic service life

K37 cable EM Pulse tone 24VAC/DC BU/GN/Y

Service life optical	50,000 h maximum		
ACOUSTIC DATA			
Volume (max) at 1m distance	85,0 dB (A)		
Acoustic signal image	Pulse tone		
Audio frequency	2900 Hz		

Permanent

5,000 h minimum


	-,	
APPROVAL DATA		
Conforms with CE	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12 Type 4X	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 24VAC/DC BU/GN/Y

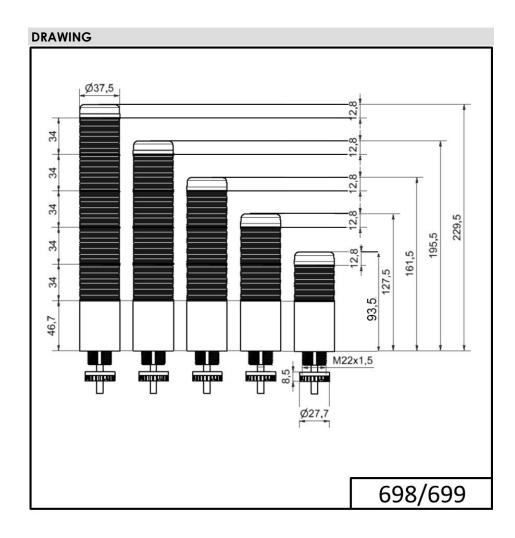

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.