

т	۵	н т	m	0





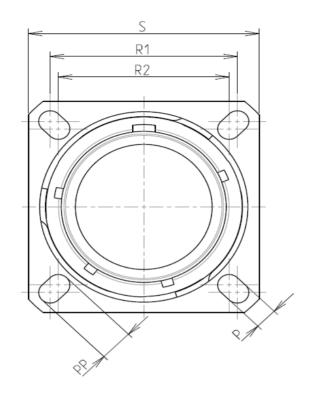

Keying Shown as example

CHARACTERISTICS

ω

 \sim


-Mass

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium							
-Shell Plating	: Black Zinc Nickel							
-Insulator	: Thermoplastic							
-Contacts	: Copper Alloy							
-Seals & Grommet	: Silicon Elastomer							
-Contact Plating	: Gold over copper Alloy 0.8µm minimum							
-Durability	: 500 Mating cycles							
-Delivered with Souriau contacts and Accessories								
-Temperature Range	: -65°C to +175°C							
-Salt Spray	: 500 hours							

: 21.27 g ± 10%

Connector dimension						
Dim	Nominal					
Р	3.25±0.2					
РР	4.93±0.2					
R1	23.01					
R2	20.62					
S	28.6±0.3					
V	20.83+0/-1.25					
W	2.1/2.5					
Z	31.5 Max					
VV THREAD	M18x1-6g					

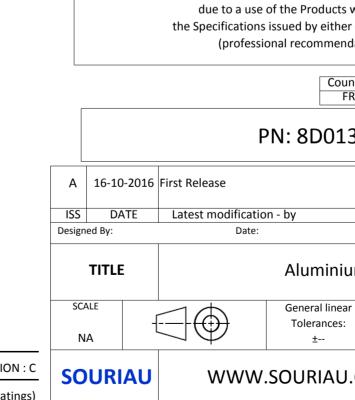

	BASIC SERIES: 8D C	0 -	13	z	08	В	с			SCALE	-		General linear Tolerances:
	SHELL TYPE : Square Flange Receptacle									NA		$\square \Psi$	±
	CONTACT TYPE : Standard Crimp Contact								ORIENTATION	:c SOUR	IAU	www	.SOURIAU.
	SHELL SIZE : 13							CONTACT TYPE : :	SOCKET(500 Matin				
PLATING : Z = Black Zinc Nickel							CON	ITACT LAYOUT : 13	-08 FORMAT			SOURIAL	
										A3			8D013Z
-	H (G				F		E		D		С	

0		Φ		A				
LAY	POUT SHOWN AS EXA	MPLE				3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed								
PN: 8D013Z08BC								
rst Release	n hu				MOD N°			
Latest modificatio Date:	11 - DY		CUSTON	MER DRAWING		-		
Aluminium Receptacle 8D series								
$\exists \bigoplus$	General linear Tolerances: ±	NPRDS / PROJECT 859				1		
WWW.	SOURIAU.CC		itr	document is the prop SOURIAU must not be reproduce nunicated without per	ed or			
	SOURIAU I 8D013Z0				SHEET 1/2			
С		B		A		J		

r	工	۵	ار (m			0	
		Contact Layout					Panel Cut	out
4	-×	$ \begin{pmatrix} \bullet & \bullet \\ \bullet \\$				SQUARE FLANGE REI REAR MO		
	Com posil LE A B CC D E E F G G H	$\begin{array}{c} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 $					ØA	
ى		mber of Size Service Contact Superseder ntacts contacts rating location 8 20 I All MS20051-3					Dim ØA ØAA R1 ØT	
	-					due	AU shall not be liable for a to a use of the Products v fications issued by either	whi
N							PN: 8D013	latio ntry R
					TIT SCALE NA		General linear Tolerances: ±	
					FORMAT A3	RIAU W	/WW.SOURIAU. SOURIAI 8D0132	U
l	Н	G	F	E	D		C	

