

| | REVISIONS | | | | | | | |
|-----|-----------|---------------------|---------|-----|-------|--|--|--|
| REV | ECO | DESCRIPTION | DATE | BY | APPR | | | |
| A1 | | RELEASE NEW DRAWING | 19MAY20 | IAN | TOMMY | | | |
| A2 | - | MODIFY PRODUCT NAME | 11AUG20 | IAN | TOMMY | | | |

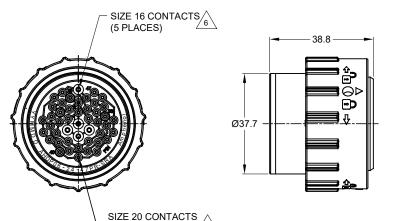

(42 PLACES)



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC; BLACK

SEAL: SILICONE RUBBER

2. MODIFICATIONS: SMOOTH RING ADAPTER (SRA); REDUCED DIA. WIRE SEAL

- 3. SPECIFICATIONS:
 - 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
 - 3.4 MOISTURE RESISTANCE: IP67&IP69K (MATED CONDITION).
 - 3.5 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.6 RoHS COMPLIANT
- 4. MATING PART: AHDP04-24-47S* (* = SEAL TYPE)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6 CONTACT SIZE AND WIRE RANGE:

| CONTACT SIZE | MIN. INSUL O.D. | MAX. INSUL O.D. | TYPICAL WIRE RANGE | CURRENT RATING |
|-----------------|----------------------|----------------------|---------------------------|-------------------|
| 20 | 1.02 mm (.040 in) | 2.10 mm (.083 in) | 16-22 AWG (1.5-0.5mm²) | 7.5 AMPS |
| 16 | 1.35 mm (.053in) | 2.62 mm (.103 in) | 14-20 AWG (2.0-0.5mm²) | 13 AMPS |



SMOOTH RING ADAPTER - BLUE

| | AHDP06-2 | 4-47PR | -SRA | | | | REF | HDP26-24-47PE | | | | ı | |
|--|------------|--|--------------|--------------------|-------------|----------|--------|-------------------|-------|----------|---------|----|---|
| | PART N | IUMBEF | ₹ | | DESCRIPTION | | | ITEM |] - | | | | |
| QUANTITY MATER | | | | RI/ | NLS | ; LI | ST | | | | | } | |
| UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). | | SIGNATURES DA | | ATE | Amphenol | | | | 1 | | | | |
| 2) Tolerances are a | | DRAWN: | IAN.XIAO | 11A | UG20 | | | ипрі | ı | 7 I I | OI | | |
| 2 PL DEC ±0.15 3 PL DEC ±0.08 | Angles ±1° | CHECKED: | ORION.LI | 12A | UG20 | | Sin | e Systems - www.a | mphe | nol-sine | .com | | |
| 3) Note reference | = X | ENGINEER: | | 44724 Morley Drive | | | | | | | | | |
| MATERIAL SPECIFICA | TIONS: | APPROVAL: | TOMMY.XIE | 13A | UG20 | | | Clinton Township, | MI 48 | 036 | | | 4 |
| | | CUSTOMER: | | | | | | PLUG,SIZE 2 | , | , | | | |
| | | THIS DRAWIN | NG IS SUPPLI | | IRES | RI | 001 SE | AL,SRA,DURA | MATE | E AHD | P SERIE | ES | |
| PROCESS SPECIFICATIONS: | | SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL | | B | C- | AHDP06-2 | 4-4 | 7PR- | SRA | A2 | | | |
| NEXT ASS'Y: | | MANUFACTU | | | PCALE. | | SHEET | 1 OF | 1 |] | | | |

ATM Series™ - Contact Size 20 Options

| Machined Contacts, Sockets & Pins | | | | | | | |
|-----------------------------------|--|------|-------|----------|--|--|--|
| Part Number | Description | Size | AWG | Туре | | | |
| AT60-010-2031 | Male Contact - Pin, Gold-plated | 20 | 16-18 | Machined | | | |
| AT62-005-20141 | Female Contact - Socket, Gold-plated | 20 | 16-18 | Machined | | | |
| AT60-010-20141 | Male Contact - Pin, Nickel-plated | 20 | 16-18 | Machined | | | |
| AT62-005-2031 | Female Contact - Socket, Nickel-plated | 20 | 16-18 | Machined | | | |
| AT60-202-2031 | Male Contact - Pin, Gold-plated | 20 | 20-22 | Machined | | | |
| AT62-201-2031 | Female Contact - Socket, Gold-plated | 20 | 20-22 | Machined | | | |
| AT60-202-20141 | Male Contact - Pin, Nickel-plated | 20 | 20-22 | Machined | | | |
| AT62-201-20141 | Female Contact - Socket, Nickel-plated | 20 | 20-22 | Machined | | | |

| | Tooling - Machined Contacts | | | | | | |
|------|-----------------------------|--|--|--|--|--|--|
| Part | Part Number | Description | | | | | |
| | CA-5D12 | Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only) | | | | | |
| 3 | CA-5E12 | Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only) | | | | | |

| Contact Removal Tools | | | | | |
|-----------------------|---------------|---|--|--|--|
| Part | Part Number | Description | | | |
| from hard | ATRT-100 | Used for removal of contacts for A Series™ products | | | |
| | AT11-240-2005 | Contact Removal Tool, Plastic, Size 20 | | | |
| | AT13-204-2005 | Sealing Plug, Size 20, White | | | |

| Stamped & Formed Contacts, Sockets & Pins | | | | | | | |
|---|--|------|-------|------------------|--|--|--|
| Part Number | Description | Size | AWG | Туре | | | |
| AT60-20-0144 | Male Contact - Pin, Gold-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT62-20-0144 | Female Contact - Socket, Gold-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT60-20-0244 | Male Contact - Socket, Gold-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT62-20-0244 | Female Contact - Socket, Gold-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT60-20-0122 | Male Contact - Pin, Nickel-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT62-20-0122 | Female Contact - Socket, Nickel-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT60-20-0222 | Male Contact - Socket, Nickel-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT62-20-0222 | Female Contact - Socket, Nickel-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT60-20-0277 | Male Contact - Socket, Tin-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT62-20-0277 | Female Contact - Socket, Tin-plated | 20 | 16-22 | Stamped & Formed | | | |
| AT60-20-0422 | Male Contact - Socket, Nickel-plated | 20 | 20-22 | Stamped & Formed | | | |
| AT62-20-0444 | Female Contact - Socket, Gold-plated | 20 | 20-22 | Stamped & Formed | | | |

| Tooling - Stamped & Formed Contacts | | | | | | |
|-------------------------------------|-------------|---|--|--|--|--|
| Part | Part Number | Description | | | | |
| | MFX-3974 | Crimp Die - Size 20 (\$&F contacts only) | | | | |
| 4 | MFX-3976 | Crimp Die - Size 20 (S&F contacts only) 20-22AWG -04XX Series | | | | |
| No. | MFX-3978 | Crimp Die - Size 20 (S&F contacts only) 20-22AWG -02XX Series | | | | |
| | АТТ-20-00 | Hand Crimp Tool - Size 20, 20AWG (S&F contacts only) | | | | |

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

AT Series™ - Contact Size 16 Options

| Machined Contacts, Sockets & Pins | | | | | | |
|-----------------------------------|--|------|-------|----------|--|--|
| Part Number | Description | Size | AWG | Туре | | |
| AT60-215-1631 | Male Contact - Pin, Gold-plated | 16 | 14 | Machined | | |
| AT62-209-1631 | Female Contact - Socket, Gold-plated | 16 | 14 | Machined | | |
| AT60-215-16141 | Male Contact - Pin, Nickel-plated | 16 | 14 | Machined | | |
| AT62-209-16141 | Female Contact - Socket, Nickel-plated | 16 | 14 | Machined | | |
| AT60-202-1631 | Male Contact - Pin, Gold-plated | 16 | 16-20 | Machined | | |
| AT62-201-1631 | Female Contact - Socket, Gold-plated | 16 | 16-20 | Machined | | |
| AT60-202-16141 | Male Contact - Pin, Nickel-plated | 16 | 16-20 | Machined | | |
| AT62-201-16141 | Female Contact - Socket, Nickel-plated | 16 | 16-20 | Machined | | |
| AT60-202-1631-22 | Male Contact - Pin, Gold-plated | 16 | 22-24 | Machined | | |
| AT62-201-1631-22 | Female Contact - Socket, Gold-plated | 16 | 22-24 | Machined | | |
| AT60-202-16141-22 | Male Contact - Pin, Nickel-plated | 16 | 22-24 | Machined | | |
| AT62-201-16141-22 | Female Contact - Socket, Nickel-plated | 16 | 22-24 | Machined | | |

| | Tooling - Machined Contacts | | | | | | |
|---------|-----------------------------|--|--|--|--|--|--|
| Part | Part Number | Description | | | | | |
| | CA-5D12 | Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only) | | | | | |
| CA-5E12 | | Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only) | | | | | |

| | Contact Removal Tools | | | | | | |
|------|-----------------------|---|--|--|--|--|--|
| Part | Part Number | Description | | | | | |
| 3 | ATRT-100 | Used for removal of contacts for A Series™ products | | | | | |
| | AT11-310-1605 | Contact Removal Tool, Plastic, Size 16 | | | | | |
| | A114017 | Sealing Plug, Size 16, White | | | | | |

| Stamped & Formed Contacts, Sockets & Pins | | | | | | | |
|---|--|------|-------|------------------|--|--|--|
| Part Number | Description | Size | AWG | Type | | | |
| AT60-14-0144 | Male Contact - Pin, Gold-plated | 16 | 14-16 | Stamped & Formed | | | |
| AT62-14-0144 | Female Contact - Socket, Gold-plated | 16 | 14-16 | Stamped & Formed | | | |
| AT60-14-0122 | Male Contact - Pin, Nickel-plated | 16 | 14-16 | Stamped & Formed | | | |
| AT62-14-0122 | Female Contact - Socket, Nickel-plated | 16 | 14-16 | Stamped & Formed | | | |
| AT60-16-0144 | Male Contact - Pin, Gold-plated | 16 | 16-18 | Stamped & Formed | | | |
| AT62-16-0144 | Female Contact - Socket, Gold-plated | 16 | 16-18 | Stamped & Formed | | | |
| AT60-16-0122 | Male Contact - Pin, Nickel-plated | 16 | 16-18 | Stamped & Formed | | | |
| AT62-16-0122 | Female Contact - Socket, Nickel-plated | 16 | 16-18 | Stamped & Formed | | | |
| AT60-16-0644 | Male Contact - Pin, Gold-plated | 16 | 18-20 | Stamped & Formed | | | |
| AT62-16-0644 | Female Contact - Socket, Gold-plated | 16 | 18-20 | Stamped & Formed | | | |
| AT60-16-0622 | Male Contact - Pin, Nickel-plated | 16 | 18-20 | Stamped & Formed | | | |
| AT62-16-0622 | Female Contact - Socket, Nickel-plated | 16 | 18-20 | Stamped & Formed | | | |
| AT60-16-0844 | Male Contact - Pin, Gold-plated | 16 | 20-22 | Stamped & Formed | | | |
| AT62-16-0844 | Female Contact - Socket, Gold-plated | 16 | 20-22 | Stamped & Formed | | | |
| AT60-16-0822 | Male Contact - Pin, Nickel-plated | 16 | 20-22 | Stamped & Formed | | | |
| AT62-16-0822 | Female Contact - Socket, Nickel-plated | 16 | 20-22 | Stamped & Formed | | | |

| Tooling - Stamped & Formed Contacts | | |
|-------------------------------------|-------------|---|
| Part | Part Number | Description |
| | MFX-3950 | Crimp Die - Size 16, 18-20AWG (S&F contacts only) |
| | MFX-3953 | Crimp Die - Size 16, 16-18AWG (S&F contacts only) |
| | MFX-3975 | Crimp Die - Size 16, 14-16AWG (S&F contacts only) |
| | MFX-3990 | Crimp Die - Size 16, 20-22AWG (S&F contacts only) |
| | ATT-16-00 | Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only) |
| | ATT-16-01 | Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only) |
| | ATT-1612-03 | Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only) |

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021