

# PRODUCT DATASHEET FP16612\_LISA3CSP-O-PIN

# LISA3CSP-O-PIN

~20° + 50° ovat beam

### **TECHNICAL SPECIFICATIONS:**

Dimensions	Ø 10.0 mm
Height	7.2 mm
Fastening	glue
ROHS compliant	yes 🛈



### MATERIAL SPECIFICATIONS:

**Component** LISA3-O LISA3-HLD2-PIN **Type** Single lens Holder


Material	Colour	Finish
PMMA	clear	
PC	black	

### **ORDERING INFORMATION:**

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FP16612_LISA3CSP-O-PIN	Single lens	2000	300	100	1.3
» Box size: 310 x 230 x 60 mm					



## PRODUCT DATASHEET FP16612\_LISA3CSP-O-PIN

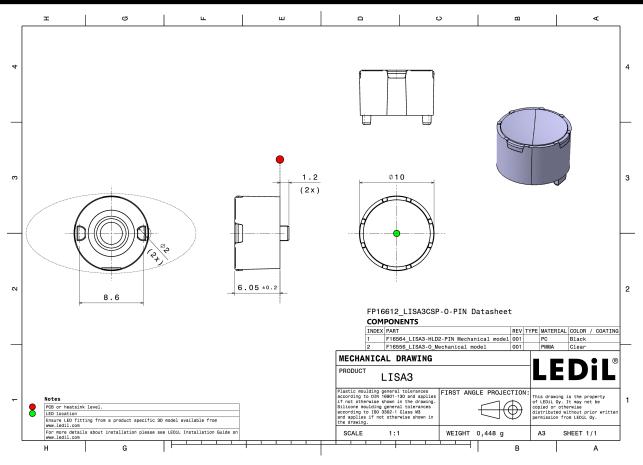

See also our general installation guide: <u>www.ledil.com/installation\_guide</u>



## PHOTOMETRIC DATA (SIMULATED):

ED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	NCSxE17A 17.0 + 48.0° / 39.0 + 80.0° 82 % 2.6 cd/lm 1 White	200 200 200 200 200 200 200 200 200 200
ED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	NFSWE11A 16.0 + 48.0° / 36.0 + 76.0° 79 % 2.6 cd/lm 1 White	200 200 200 200 200 200 200 200
ED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	NVSxE21A 20.0 + 46.0° / 40.0 + 77.0° 82 % 2.4 cd/lm 1 White	200 200 200 200 200 200 200 200
OSRAM Opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required components:	OSCONIQ C 2424 24.0 + 48.0° / 49.0 + 80.0° 83 % 2.1 cd/lm 1 White	



## PHOTOMETRIC DATA (SIMULATED):

SAMSU	NG	50* 24*
LED	LH181B	
FWHM / FWTM	23.0 + 44.0° / 48.0 + 80.0°	73
Efficiency	82 %	
Peak intensity	2 cd/lm	
LEDs/each optic	1	
Light colour	White	¢
Required components	:	2000 30* 2000 30* 30* 12* 30*
		50*
LED	Z8Y15	
FWHM / FWTM	18.0 + 48.0° / 40.0 + 79.0°	72
Efficiency	80 %	60 <sup>4</sup>
Peak intensity	2.5 cd/lm	$\sim$
LEDs/each optic	1	
Light colour	White	
Required components	:	210
		90' 91'
LED	Z8Y19	
FWHM / FWTM	22.0 + 45.0° / 45.0 + 78.0°	2
Efficiency	80 %	000 000 000 000 000 000 000 000 000 00
Peak intensity	2.1 cd/lm	
LEDs/each optic	1	
Light colour	White	er
Required components	:	



## PRODUCT DATASHEET FP16612 LISA3CSP-O-PIN

### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

### LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B **Casic Motor Building** Shenzhen 518057 P.R.CHINA

### Local sales and technical support www.ledil.com/ where\_to\_buy

**Shipping locations** Salo, Finland Hong Kong, China

### **Distribution Partners** www.ledil.com/ where\_to\_buy

Published: 21/01/2019 Last update: 03/01/2020 Subject to change without prior notice LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.