



(1)

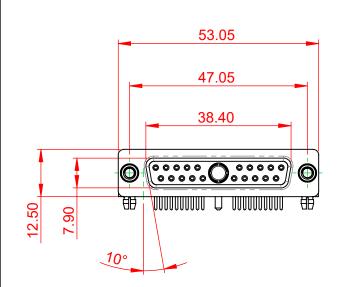



NOTES:

.XX


±0.13

.XXX ±0.05

| MATERIAL: HOUSING: SHELL: CONTACT: | THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED | |
|--|---|--|
| OPERATING TEMPERATURE: | -55°C ~ 125°C | |
| POWER/CO-AX CONTACT RATING: (IF PRESENT) | 10A (CURRENT) | |
| SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE: | 5A PER CONTACT 10mΩ MAX. | |
| INSULATOR RESISTANCE: DIELECTRIC | 5000MΩ min. | |

1000V AC rms

SW COMBINATION D-SUB DR СН THESE DRAWINGS AND SPECIFICATIONS SC EDAC INC ARE THE PROPERTY OF EDAC INC. AND TORONTO, ONTARIO





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



WITHSTANDING VOLTAGE:

CANADA

SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

PART NUMBER:

| · · · · · · · · · · · · · · · · · · · | | |
|---------------------------------------|--------------------|-----|
| SW REFERENCE NO.: 630 C | OMBO ASSEMBLY | |
| DRAWN: C.B | DATE: JAN. 01/2019 | |
| CHECKED: | DATE: | |
| SCALE: (IN C.A.D. 1:1) | SHEET 1 OF 2 | |
| DRAWING NUMBER: 630-21W | 1250-1ND IS | SUE |

630-21W1250-1ND

1

