

| т | ۵ | п – | m | D | 0 |
|---|---|-----|---|---|---|
| | | | | | |



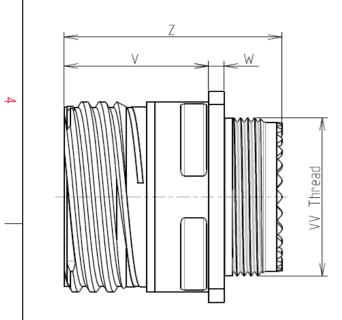

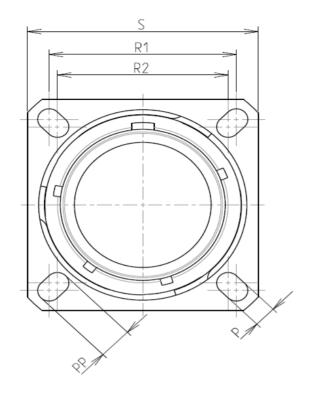

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Aluminium | | | |
|--|--|--|--|--|
| -Shell Plating | : Black Zinc Nickel | | | |
| -Insulator | : Thermoplastic | | | |
| -Contacts | : Copper Alloy | | | |
| -Seals & Grommet | : Silicon Elastomer | | | |
| -Contact Plating | : Gold over copper Alloy $0.8 \mu m$ minimum | | | |
| -Durability | : 500 Mating cycles | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| -Temperature Range | -65°C to +175°C | | | |
| -Salt Spray | : 500 hours | | | |

: 13.92 g ± 10%

8D 0

G

11

Ζ

22

В

F

А

| Connector dimension | | | | | |
|---------------------|---------------|--|--|--|--|
| Dim | Nominal | | | | |
| Р | 3.25±0.2 | | | | |
| PP | 4.93±0.2 | | | | |
| R1 | 20.62 | | | | |
| R2 | 18.26 | | | | |
| S | 26.2±0.3 | | | | |
| V | 20.83+0/-1.25 | | | | |
| W | 2.1/2.5 | | | | |
| Z | 31.5 Max | | | | |
| VV THREAD | M15x1-6g | | | | |
| | | | | | |


ORIENTATION : A

CONTACT LAYOUT : 11-22

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

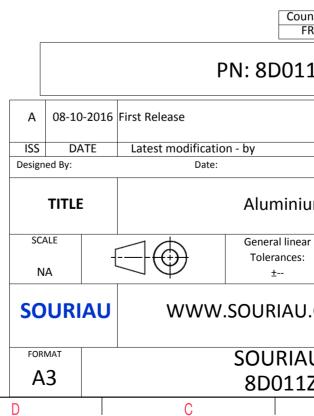

| σ | I. | | A | | | |
|--------------------------|---|-------------------------|-----------|-------|---|--|
| | | L. L. | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | 2 | | | 4 | |
| | 1 | | | | | |
| | | 7 | | | | |
| | | r - | | | | |
| | | | | | | |
| | | 1 | | | | |
| | | 1 | | | | |
| | | | | | | |
| S EXAMPLE | | | | | 3 | |
| - | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| any non-co which does | | | 2 | | | |
| er of the Par | hich does not comply with of the Parties or by a third party tion, technical notice.) | | | | | |
| | | ce.j | | | | |
| Intry R | | ion & Con Not Listed | | | 2 | |
| 47220 | ٨ | | | | | |
| 1Z22B | A | | | | | |
| | | | | | | |
| | | | | MOD N | • | |
| | | CUSTOME | R DRAWING | | _ | |
| um Rece | ptacle | 8D ser | ies | | | |
| ar | | NDBUC | / PROJECT | | _ | |
| | | | 359 | | 1 | |
| | This document is the property of | | | | | |
| J.COM | COM SOURIAU it must not be reproduced or communicated without permission | | | | | |
| U DRG | i N° | | | SHEET | _ | |
| Z22BA | | | | 1/2 | | |
| В | | | A | 1 | | |
| | | | | | | |

| | | _ | | | | |
|---|---------------|--|---|---|---|---|
| | | Contact Layout | | | | Panel Cut |
| 4 | (| 22* | | | Σ - | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| | Ctc A B | 4#22D 11-22 X Y 1.905 1.905 1.905 -1.905 | | | ¥ | ØT. |
| ى | C D | -1.905 -1.905 -1.905 1.905 | | | | Dim ØA ØAA R1 ØT |
| | ŀ | | | | | SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment |
| 2 | | | | | | PN: 8D012 |
| | | | | | A 08-10-201 ISS DATE Designed By: | 6 First Release Latest modification - by Date: |
| _ | | | | | SCALE NA | Aluminiu General linear Tolerances: ± |
| | | | | | FORMAT | J WWW.SOURIAU SOURIA |
| | Н | G | F | E | A3 | 8D0112 |
| | | | | | V | |

Т

ш

т

G

0

