

т	۵	<b>п</b>	m	0



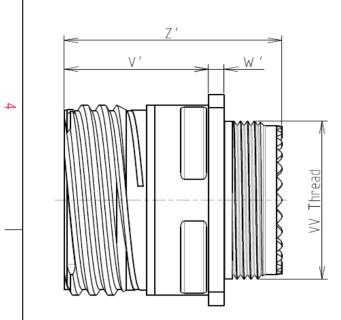



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +175°C
-Salt Spray	: 2000 hours

: 14.1 g ± 10%

8D 0

G

13

J

08

Ρ

F


D

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
РР	4.93±0.2				
R1	23.01				
R2	20.62				
S	28.6±0.3				
V	19.5+1.4/-0				
W'	2.1/3.65				
Ζ'	32 Max				
VV THREAD	M18x1-6g				

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

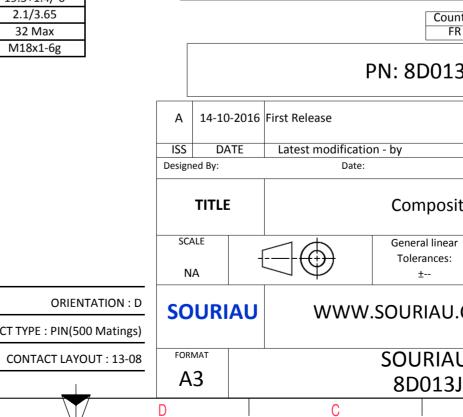

	Ξ		A				
					3		
S EXA	AMPLE						
whic er of t	any non-conformity or damage which does not comply with r of the Parties or by a third party dation, technical notice.)						
intry R	/ Jurisdiction & Control List Not Listed						
.3J(	JO8PD						
				MOD N°			
		CUSTOME	R DRAWING		-		
	e Receptacle 8D series						
ar	NPRDS / PROJECT 859						
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	U DRG N° SHEET						
5019	BPD-C		A	1/2	J		

	Ξ	۵		т	П	п	D		0	
		Contact Layout								Panel Cutout
4		x x x x x x x x x x						SQI	JARE FLANGE RECEPTACLE REAR MOUNTING R1	(TYPE 0)
		Contacts (Insert arrangement 13-8)           Contact position ID         Contact location X-axis (mm)           A         +.065 (1.65)         +.157 (3.99)           B         +.170 (4.32)         +.000 (0.00)           C         +.120 (3.05)        120 (3.05)           D         .000 (0.00)        170 (4.32)           E        120 (3.05)        120 (3.05)           F        170 (4.32)         +.000 (0.00)           G        065 (1.65)         +.157 (3.99)           H         +.000 (0.00)         +.044 (1.12)								
ယ		ement Number of Size Service contacts contacts rating 8 8 20 I	Contact Supersedes location All MS20051-8							Dim ØA ØAA R1 ØT
									due to a use the Specification	not be liable for any of the Products whi s issued by either of ional recommendati
22							L			Country FR PN: 8D013J
	-						A ISS Desig		First Release Latest modificati Date:	on - by
							S			Composite General linear Tolerances:
<u> </u>									vww	<u>±</u>
								RMAT <b>\3</b>		SOURIAU 8D013J0
	Н	G		F	l E		D		С	

