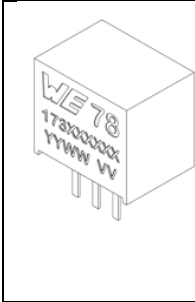
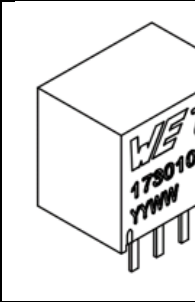

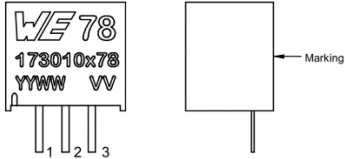
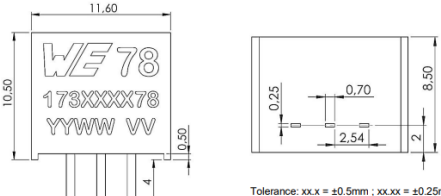
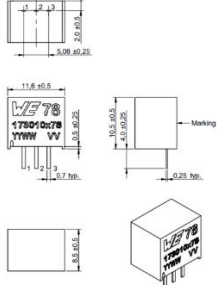


Product / Process Change Notification (PCN)	
<input checked="" type="checkbox"/> Major change <input type="checkbox"/> Minor change	
<p>PCN #: PCN_WPME-FDSM_20220520_4</p> <p>Affected Series: FDSM; 173010378, 173010578</p> <p>PCN Date: February 21, 2022</p> <p>Effective Date: May 20, 2022</p>	<p>Change Category:</p> <input type="checkbox"/> Equipment / Location <input checked="" type="checkbox"/> General Data <input type="checkbox"/> Material <input type="checkbox"/> Process <input type="checkbox"/> Product Design <input type="checkbox"/> Shipping / Packaging <input type="checkbox"/> Supplier <input type="checkbox"/> Software
<p>Contact: Product Management</p> <p>Phone: +49 (0) 7942 - 945 5001</p> <p>Fax: +49 (0) 7942 - 945 5179</p> <p>E-Mail: pcn.eisos@we-online.com</p>	<p>Data Sheet Change:</p> <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <p>Attachment:</p> <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<p>Description and purpose of change:</p> <p>For the purpose of a datasheet information enlargement, Würth Elektronik has updated the internal content of the datasheet.</p> <p>This is a datasheet correction only. There will be no change in form, fit, function, quality or reliability of the product.</p>	
<p>Detail of Change:</p> <p>1. Updated front page drawing. (page 1)</p>	
<p>Before</p> 	<p>After</p> 



2. Updated pinout drawing to include pin 1 marking. (page 2)

Before	After
<p>PACKAGE</p> 	<p>PINOUT (PACKAGE TYPE F)</p>  <p>Type F package pins are located at the front</p>

3. Updated physical dimensions drawings to include pin 1 marking. (page 37)

Before	After
<p>PHYSICAL DIMENSIONS</p>  <p>Tolerance: xxx = ±0.5mm ; xx,xx = ±0.25mm</p>	<p>PHYSICAL DIMENSIONS</p> 

4. Updated recommended drill holes. (page 10)

Before	After
<p>RECOMMENDED DRILL HOLES</p> 	 <p>All dimensions in mm</p>

Reliability / Qualification Summary:

There will be no change of the product, therefore no additional reliability or qualification testing will be performed.