



ISSUE NUMBER	
ORIGINAL	(1)

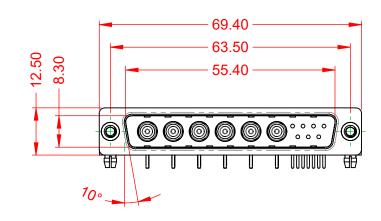




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING:	50Ω (IMPEDANO
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTA
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05


DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

ICE) ACT

-55°C ~ 125°C

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-13W6640-5N3		ISSUE
	YOUR CONNECTION TO C	QUALITY & SERVICE		PART NUMBER: 629-13W	/6640-5N3	1



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

