


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

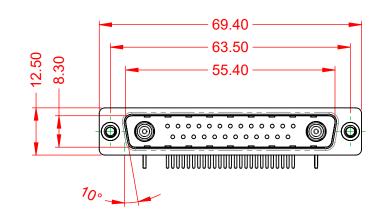




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.INSULATOR RESISTANCE: $5000M\Omega$ min.DIELECTRICDIELECTRIC

1000V AC rms

-55°C ~ 125°C



				SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINAT	COMBINATION D-SUB		COMBINATION D-SUB DRAWN: C.B DATE: JAN. 01/20		19	
			DATE:			
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTA CANADA	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-27W	2240-5NA	ISSUE		
YOUR CONNECTION TO QUALITY & SERVI	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-27W	2240-5NA	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

