

 G	П	m	O





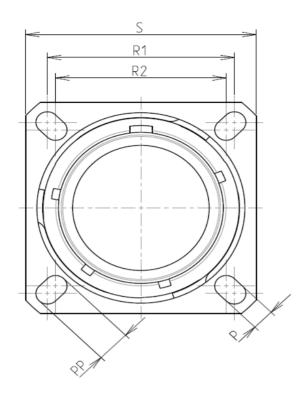

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 30.12 g ± 10%

8D 0

G

11

Κ

02

S

F

В

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 20.62 R1 18.26 R2 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M15x1-6g

(professional recomment Cou F PN: 8D01 06-10-2016 First Release А DATE ISS Latest modification - by Designed By: Date: TITLE Stainless S SCALE General linea Ð Tolerances: NA ±---**ORIENTATION : B SOURIAU** WWW.SOURIAU CONTACT TYPE : SOCKET(500 Matings) FORMAT SOURIA CONTACT LAYOUT : 11-02 A3 8D011 С Е D

0		Φ		A			
					4		
LAY	YOUT SHOWN AS EXA	AMPLE			3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
FR Not Listed PN: 8D011K02SB							
First Release							
Latest modificatio Date:	n - by		CUSTOMER DRAWI	MOD N°			
	Stainless Stee	el Recept	acle 8D series				
$\exists \bigoplus$	General linear Tolerances: ±	NPRDS / PROJECT 859					
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
SOURIAU DRG N° SHEET 8D011K02SB-C 1/2							
С		B		A	J		

г	т	۵		П	m	D		0	
		Contact Layout							Panel Cutou
4	.× .0 (2.	+Y IB IA +Y +Y +X +X +X (2.41mm)					2 -	SQUARE FLANGE RECEPTACLE (REAR MOUNTING R1	TYPE O)
	Shell Arrangement size no.	X-axis (mm) Y-axis (mm) +.095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00) Number of Size Service	Contact location All				¥ (ØT ØA
ى دى									ØA ØAA R1 ØT
	F							due to a use the Specifications	not be liable for an of the Products wh issued by either of onal recommendat
N								F	PN: 8D011
						A IS Desi	S DATE gned By:	16 First Release Latest modificatio Date:	
<u> </u>							CALE NA		General linear Tolerances: ±
						FC		JWWW	SOURIAU.C
	Н	G		F	E		43	С	8D011K

