
<b>⊥ </b>			0	B			
ØS-							
			LAYOUT SHOWN AS EXAI	MPLE			
	Keying Shown as example						
CHARACTERISTICS	Connector dimension						
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium	DimNominalØS25 Max	[					
-Shell Plating : Nickel	Z 31 Max VV THREAD M15x1-6g		SOURIAU shall not be liable for any n due to a use of the Products which				
-Insulator : Thermoplastic	A A HINCAP MITOYT-OR		the Specifications issued by either of th	e Parties or by a third party			
-Contacts : Copper Alloy			(professional recommendation	n, technical notice.)			
-Seals & Grommet : Silicon Elastomer		<u> </u>	Country	Jurisdiction & Control List	]		
-Contact Plating : Gold over copper Alloy 0.8µm minimum		Г	FR	Not Listed	] 1		
-Durability : 500 Mating cycles			PN: 8D511F01AN				
-Delivered with Souriau contacts and Accessories							
-Temperature Range -65°C to +200°C		A 15-10-2016	First Release				
-Salt Spray : 48 hours -Mass : 14.98 g ± 10%		ISS DATE	Latest modification - by		MOD N°		
		Designed By:	Date:	CUSTOMER DRAWING			
		TITLE	TITLE Aluminium Plug 8D series				
		SCALE	General linear				
BASIC SERIES: 8D 5 - 11 F	01 A N		Tolerances:	NPRDS / PROJECT <b>859</b>			
SHELL TYPE : Plug with RFI Shielding		NA		This document is the prop	perty of		
CONTACT TYPE : Standard Crimp Contact	ORIENTATION	- SUURIAU	WWW.SOURIAU.CO	COLIDIALI			
SHELL SIZE : 11	CONTACT TYPE : PIN(500 Matin			communicated without pe			
PLATING : F = Nickel	CONTACT LAYOUT : 11	I-01 FORMAT A3	SOURIAU D	DRG N°	SHEET		
			8D511F01		1/2		

	<b>工</b>	G	וד	т	D	0
		Contact Layout				
4		01				
		1#12 11-01	٦			
ى	Ctc A	X Y 0 0				
	-					SOURIAU shall not be liable for any due to a use of the Products wh
2						the Specifications issued by either of (professional recommendat Countr FR
					A 15-10-201 ISS DATE Designed By:	PN: 8D511F
_					SCALE NA	Alumin General linear Tolerances:
					SOURIAU	J WWW.SOURIAU.C
	н	G	F	E	FORMAT A3	SOURIAU 8D511FC
		· · · · · ·	•	-		

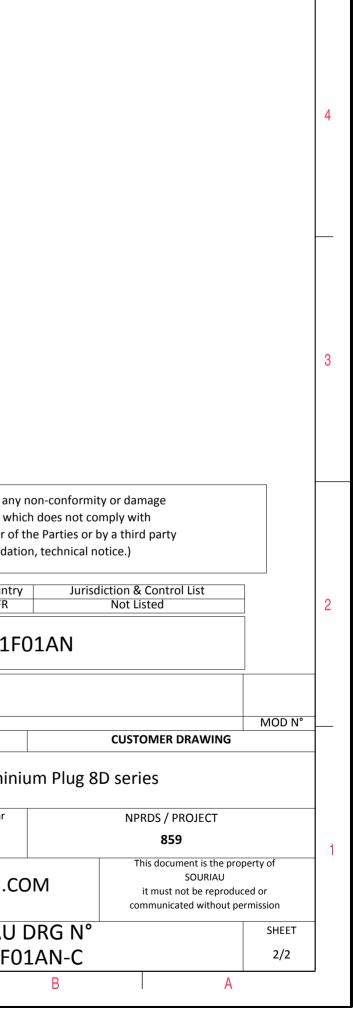

 $\triangleright$ 

σ