Touchkit with capacitive touchscreen



Description

- Kit content:

- 1x 10.1" SCHURTER Touchscreen Sensor on 2 mm float glass
- 1x PCAP controller board (EETI chipset)
- 1x Active Touchscreen Stylus
- 1x 1 m mini USB-Cable
- 4x self adhesive Feet
- 1x USB stick with evaluation software
- 1x AAAA battery for the active stylus
- 1x Quick Start Guide

Unique Selling Proposition

- Plug and Play
- Multitouch functionality
- Glove operation

Technical Data

Sensor			
Туре	T1542		
Size	10.1 " active area 139.6 mm x 221 mm		
Electrode Pitch	5.52 mm x 5.37 mm		
Material	PET + ITO + Kapton tail		
Cover	2 mm float glass		
Printing	Black with SCHURTER Logo		
Channel-count	26 x 40 channels		
Operating Temperature	-10°C to +70°C		
Storage Temperature	-20 °C to +75 °C		
Controller			
Chipset	EETI EX3146		
Size	30 mm x 65 mm		
Channel-count	max. 30 x 42 channels (including shield		
	lines)		
Input voltage	3.5 V ~ 5.5 V typ. 5 V (powered via		
	USB)		
Power consumption	Active mode: < 50 mA		
	Idle mode: < 30 mA		
Operating Temperature	-40 °C to +85 °C		
Storage Temperature	-40 °C to +90 °C		
Relative humidity	95% at 60 °C RH nicht kondensierend		
Interface	USB 1.1 Full speed (mini-USB)		
	I²C 100 - 400 kHz (2.54 mm pitch sol-		
	dering interface) *		
Response time	< 25 ms		
Report rate	> 100 Hz (1 - 10 fingers)		
USB-HID	Compatible (Windows / Linux / Mac OS)		

* only on customer request

Approvals and Compliances

See below: **Approvals and Compliances**

Characteristics

- Capacitive touch sensor
- No external power supply necessary
 Choice of 2 sensitivity modes
- Up to 10 fingers at one time

- Hand palm rejection
- Water resistant - EMC up to 10 Vrms conducted immunity and 10 V/m radiated immunity

Weblinks

pdf data sheet, html datasheet, General Product Information, CAD-Drawings, Product News, Detailed request for product, Microsite

Active Touchscreen stylus				
Size	9.7 mm x 140.7 mm			
Battery	1 x AAAA			
Buttons	2			
Included Software				
Hardware calibration tool	EXC3062RunCalibration.bat			
SCHURTER PCAP Analyzer	AnalyserTool.exe			
SCHURTER Sensitivity Tool	SensitivityTool.exe			
SCHURTER Sensitivity Tool	SensitivityTool.exe			

Touchkit

Touchkit

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals


SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]

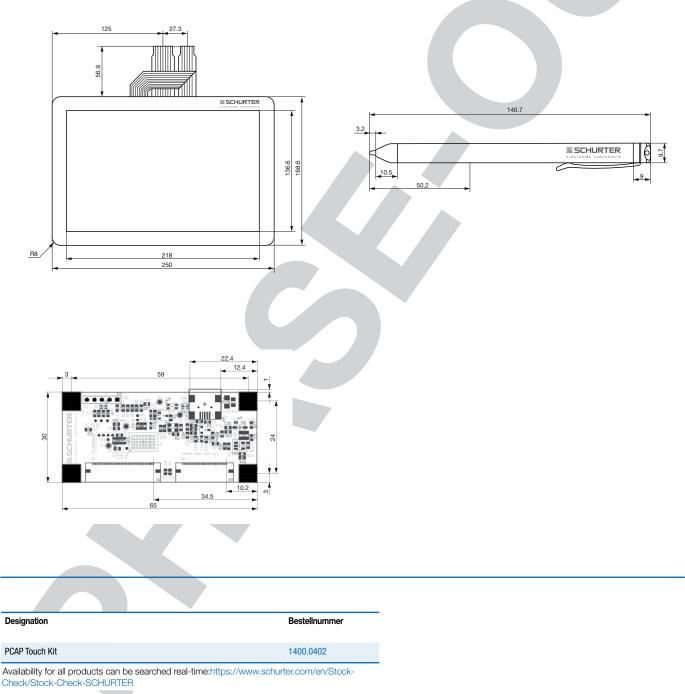

Packaging unit 1 Kit



Contents of the Design-In-Kit

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.