

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** 

ORIGINAL

(1)



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

**OPERATING TEMPERATURE:** 


POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT)

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.


**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

-55°C ~ 125°C

1000V AC rms



				SW REFERENCE NO.: 630 COMBO ASSEMBLY					
				DRAWN: C.B		DATE: JAN. 01/2019		19	
				CHECKED:		DATE:			
Y		EDAC INC TORONTO, ONTARIO CANADA D QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D.	1:1)	SHEET 1	OF	2	
				DRAWING NUMBER: 630-13W6240-1NE		6240-1NB		ISSUE	
	YOUR CONNECTION TO Q			PART NUMBER:	630-13W	6240-1NB		1	

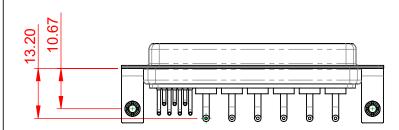

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

