



(1)

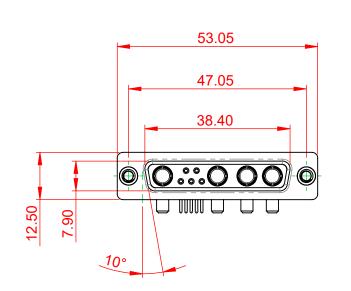




NOTES:

MATERIAL:
HOUSING:
SHELL:
CONTACT:THERMOPLASTIC POLYESTER, UL94V-0
STEEL, TIN PLATED
COPPER ALLOY, GOLD FLASH PLATEDOPERATING TEMPERATURE:
OPERATING TEMPERATURE:-55°C ~ 125°CPOWER/CO-AX CONTACT RATING:
SIGNAL CONTACT CURRENT RATING:
SIGNAL CONTACT RESISTANCE:30A (CURRENT)
10mΩ MAX.


INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

.XX ±0.13

.XXX ±0.05



			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	C THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	NTARIOSHALL NOT BE REPRODUCED, OR COPIEDOR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-9W4-240-3TA		ISSUE	
	RVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-9W4	-240-3TA	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

