




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL





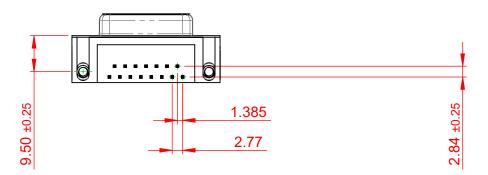

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +85°C

3A PER CONTACT CURRENT RATING:

CONTACT RESISTANCE: 25mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

10°



EDAC INC TORONTO, ONTARIO CANADA

622 SERIES D-SUB CONNECTOR

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 1	
CHECKED:	DATE:	
DRAWN: C.B	DATE: AUG. 01/2018	
SW REFERENCE NO.: 622 A	22 ASSEMBLY	

ISSUE DRAWING NUMBER: 622-015-668-031 PART NUMBER: 622-015-668-031