


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** ORIGINAL


(1)



MATERIAL: HOL SH CO

## NOTES:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

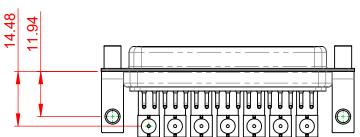

JUSING:	
IELL:	
ONTACT:	

**OPERATING TEMPERATURE:** 

POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms

5000MΩ min.

-55°C ~ 125°C



		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-24W	7240-5T6	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-24W	7240-5T6	1



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

