۳ Π	m		0		Þ	]
A Z						4
			LAYOUT SHOWN AS EX	XAMPLE		3
Key	ring Shown as example					
CHARACTERISTICS						
-Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal					
-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum	ØS41.7 MaxZ31 MaxVV THREADM31x1-6g		SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat Countr	hich does not comply with f the Parties or by a third party tion, technical notice.)		2
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D521F			2
-Temperature Range -65°C to +200°C		A 06-10-2016 Fi	irst Release			
-Salt Spray : 48 hours 		ISS DATE	Latest modification - by		MOD N°	
19032 · +3.53 B - 10/0		Designed By:	Date:	CUSTOMER DRAW		
		TITLE	Alumin	ium Plug 8D series		
BASIC SERIES: 8D 5 - 21 F 48 A SHELL TYPE : Plug with RFI Shielding	A N	SCALE	General linear Tolerances: ±	NPRDS / PROJEC 859		-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIENTATION : N	SOURIAU	WWW.SOURIAU.C		AU eproduced or	
	CONTACT TYPE : PIN(500 Matings)	FORMAT	COUDIAL	communicated wit		_
PLATING : F = Nickel	CONTACT LAYOUT : 21-48	A3	SOURIAU		SHEET	
			8D521F4		1/2	
H G F	E T	D	C	B	А	

	т	۵	н <b>г</b>	т	D	0	
		Contact Layout					
4							

F

Е

G

Н


4#8 Power

	21-48				
Ctc	х	Y			
Α	4.57	4.57			
В	4.57	-4.57			
C	-4.57	-4.57			
D	-4.57	4.57			

ယ

 $\sim$ 

due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country FR PN: 8D521F48AN 06-10-2016 First Release А ISS DATE Latest modification - by Designed By: Date: TITLE SCALE General linear  $( \bigcirc$ Tolerances: NA ±---**SOURIAU** WWW.SOURIAU.COM FORMAT A3 С D

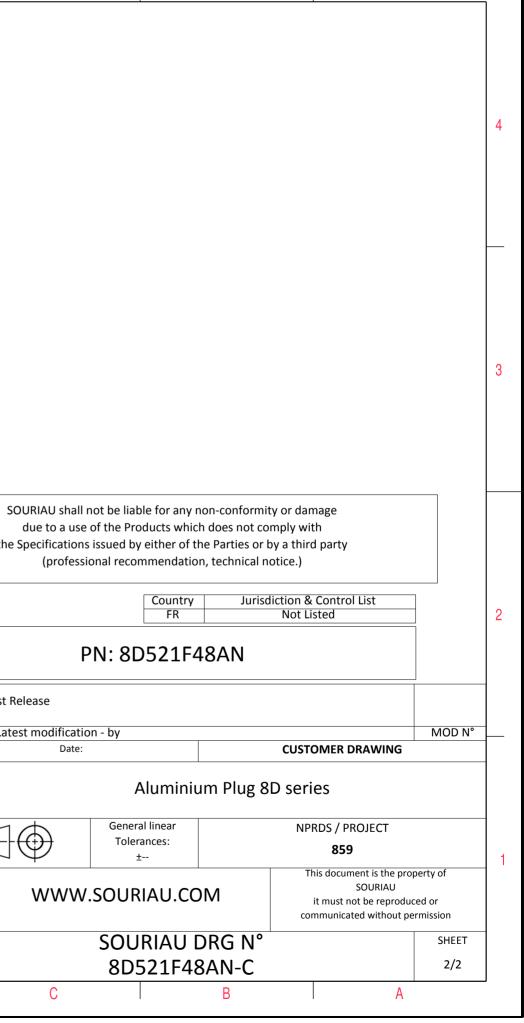

 $\succ$ 

ω