

2 W

DC- 8 GHz


SMB

COAXIAL ATTENUATOR

issue
15. jul. 93

Page
1 / 1

DRAWING

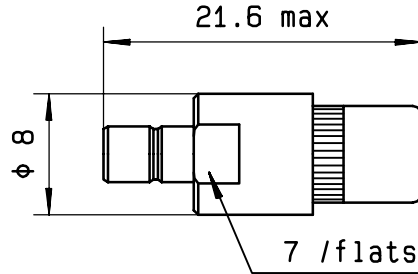

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 8 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 20 dB

| | | |
|----------------|---------------|---------------|
| FREQUENCY | DC- 4 GHz | 4 - 8 GHz |
| V.S.W.R | <= 1.15 | <= 1.30 |
| DEVIATION (dB) | + 0.5 / - 0.5 | + 0.5 / - 0.5 |


TEMPERATURE SENSITIVITY : 4×10^{-4} dB / (dB * °C)
 PEAK POWER at 25°C (1µs, 1%.) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMB male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

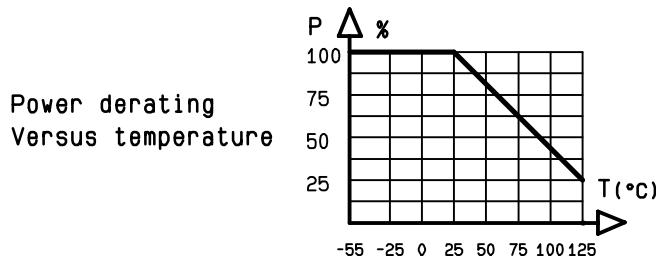

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

4112-9211

| | | | |
|---|-------------|-----------|------|
| QUALITY Dpt app. _____ | | | |
| CREATION PEN : CAT EP : ----- Nom : KL Date : 24. apr. 89 | 15. jul. 93 | New issue | HS |
| ISSUE | | REVISIONS | NAME |

RADIALL®

101. Philibert Hoffmann | Phone: 33.1.49353535
 - Z.I Ouest - | Fax : 33.1.48546363
 93116 ROSNY/BOIS Cedex-FRANCE | Tlx RADIA 235220F