

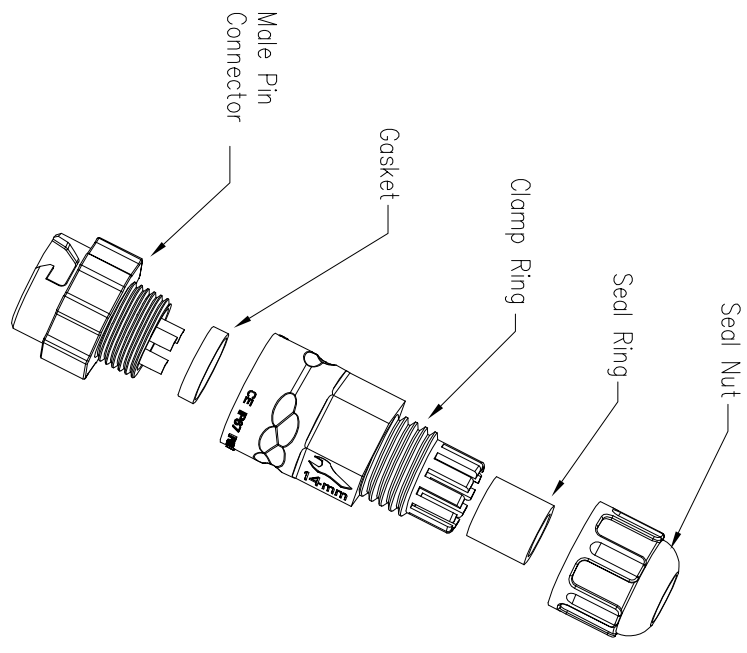
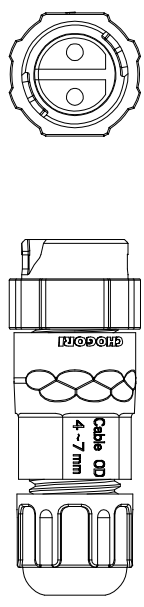


REV.	EN. NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

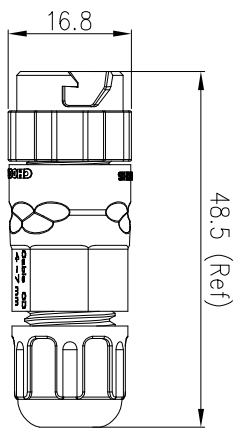

**Specification:**


1. Operation Temperature: -45°C~105°C.
2. Insulation Resistance: 100MΩ at DC500V.
3. Contact Resistance: <10mΩ
4. Withstand Voltage: 2000V AC
5. Operating Current: 10A
6. Operating Voltage: AC 300V
7. Waterproof Rate: IP67 (Mated)
8. Seal Nut: Nylon, Black
9. Seal Ring: Silicon, Black
10. Clamp Ring: Nylon, Black
11. Gasket: Silicon, Red
12. Male Pin: Copper Alloy, Gold Plated
13. Connector: Nylon+GF, Black
14. RoHS Compliant.
15. UL Compliant.
16. Cable Range OD: φ3.5mm~φ6.8mm
17. Mating Cap: 806-00062-00

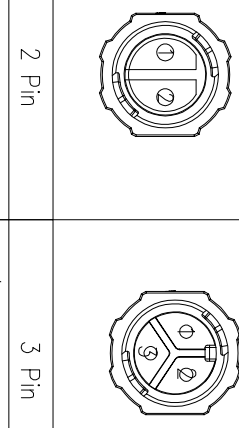

P/N: 22002331-01	P/N: 22003331-01
------------------	------------------

Pin Assignments Front View

UNIT: mm	DESCRIPTION
TOLERANCE X XX XXX ANGLES	Standard Series Push Lock Female Plug With Male Pin
±0.25 ±0.15 ±0.05 ±1°	SCALE: 1:1
	SIZE: A4
	SHEET: 1 OF 1
	REV: C1
	* : Inspection Item



**CHOGORI**

PART NO	22XX331-01	DRAWN BY	Liu	DATE	2019/08/13
DWG NO		CHECKED BY	Mo	DATE	2019/08/13
CUSTOMER		APPROVED BY	Panson	DATE	2019/08/13