


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	45 Ω	125 Ω	280 Ω
Minimum	- Ω	100 Ω	- Ω

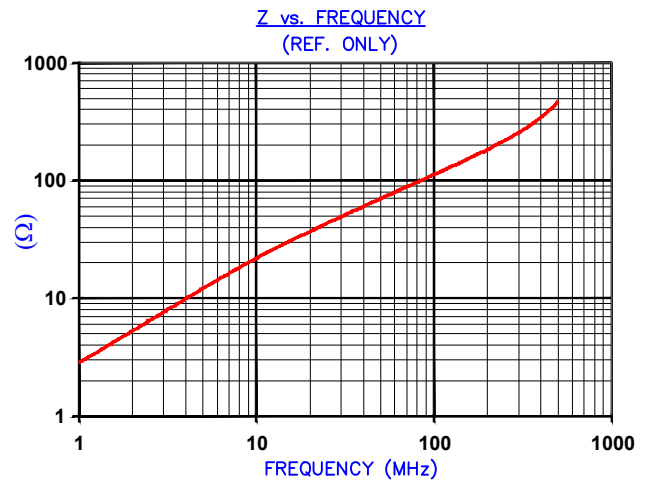


AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF #6261

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	15.60 [.614]	+	0.30 [.012]
B	13.60 [.535]	+	0.26 [.010]
C	18.00 [.709]	+	0.25 [.010]
D	2.80 [.110]	+	0.25 [.010]
		-	0.20 [.008]
E	0.70 [.028]	+	0.15 [.006]

WEIGHT/1000 2.96 kgs [6.52 Lbs]



DETAIL "A"
CHAMFER
SCALE=20:1

SCALE DRAWING 1:1

28R0614-300

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
				PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
				28R0614-300		B	FERRITE CNZ CORE	JUN
B	UPDATED D DIM	03/05/12	Jcai	DATE:	02/04/10	SCALE:	4:1	MATERIAL:
A	ORIGINAL DRAFT	02/04/10	JUN	CAD #	28R0614-300-B	TOOL #	R0614	Ferrite
REV	DESCRIPTION	DATE	INT					

