
<u>т</u>	م	П		т	C	ן כ	0	σ	▶	
	V Thread	ØS								
				ş			LAYOUT SHOWN A	AS EXAMPLE		
		Keying Show	wn as example							
CHARACTERISTICS				ctor dimension						
Standard : Based on MIL-DTL-389	99 Series III		Dim	Nominal						
-Shell Material : Aluminio			ØS Z	25 Max 31 Max			SOURIAU shall not be liable for			
-Shell Plating : Black Zir			VV THREAD				due to a use of the Products the Specifications issued by eithe			
-Insulator : Thermo							(professional recommer			
-Contacts : Copper /										
-Seals & Grommet : Silicon E		~							on & Control List ot Listed	
-Contact Plating : Gold over -Durability : 500 Mat	r copper Alloy 0.8μm minimun	n]
-Delivered without Souriau contac							PN: 8D51	1Z02PDL		
-Temperature Range65°C to					Г]
-Salt Spray : 500 hou						A 18-10-2016	First Release			
-Mass : 13.99 g :						ISS DATE	Latest modification - by			MOD N°
						Designed By:	Date:	CI	USTOMER DRAWING	
						TITLE	Aluminium Plug 8D series			
BASIC SERIES:	8D 5 - 11	Z 02 P D	lι		-	SCALE	General linea	ar	NPRDS / PROJECT	
SHELL TYPE : Plug with RFI Shield				Delivered W/O	Contacto	NA	Tolerances:		859	
									This document is the pro	perty of
CONTACT TYPE : Standard Crim	Contact					SOURIAU	WWW.SOURIAU	J.COM	SOURIAU it must not be reprodu	
SHELL SIZE : 11				CONTACT TYPE : PIN(500	L				communicated without pe	
PLATING : Z = Black Zinc N	ickel			CONTACT LAYOU	JT : 11-02	FORMAT A3		U DRG N°		SHEET
								Z02PDL-C		1/2

r	Ŧ	۵	т	m	D	0	
		Contact Layout					
4	.x .0 (2)	+Y IB IA +Y +X 95 4(mm) (2.4(mm))					
	Shell Arrangement no. 11 -2	tion X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00)					
ω							
	+					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe (professional recommer	s w er o
N						PN: 8D51	
					A 18-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					TITLE SCALE NA	Alun General line Tolerances ±	ar
_					SOURIA		J.(
					FORMAT A3	SOURIA 8D511	
L	Н	G	F	E	D	С	

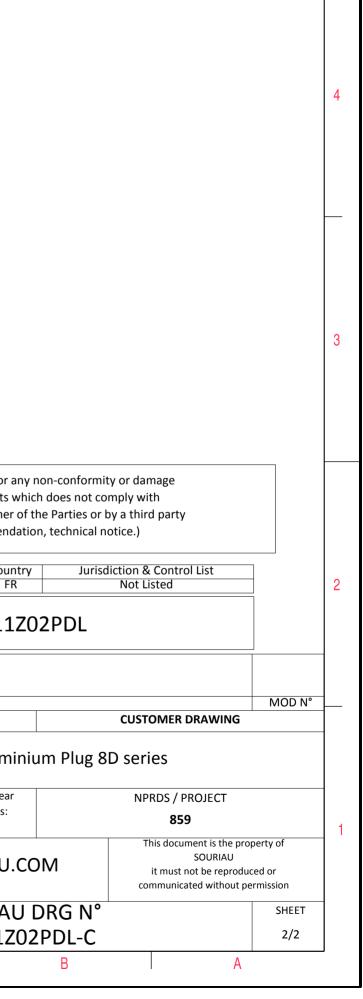

 \triangleright

σ