


Data sheet | Item number: 706-3057/100-100

System cable; for Schneider TSX; 16 digital inputs for higher voltages;
Length: 1 m; Conductor cross-section: 0.34 mm²



www.wago.com/706-3057/100-100

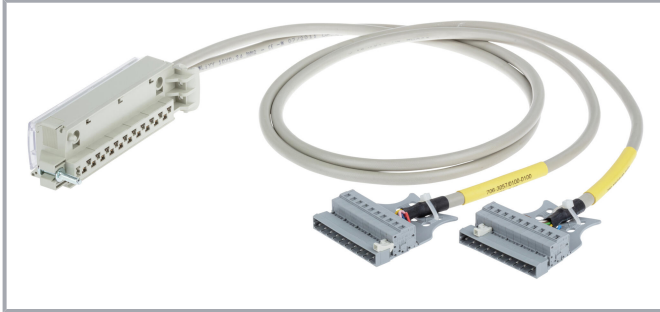

Color coding acc. to DIN VDE 47100 Cable 1; Channel 0-7		WAGO 231 series (JA)		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	IN0.0	1	L0
Brown		2	IN0.1	2	L1
Green		3	IN0.2	3	L2
Yellow		4	IN0.3	4	L3
Grey		5	IN0.4	5	L4
Pink		6	IN0.5	6	L5
Blue		7	IN0.6	7	L6
Red		8	IN0.7	8	L7
Black		9	L/+	18	L/+
Violet		10	N/-	17	N/-

Color coding acc. to DIN VDE 47100 Cable 2; Channel 8-15		WAGO 231 series (JB)		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		11	IN1.0	9	L8
Brown		12	IN1.1	10	L9
Green		13	IN1.2	11	L10
Yellow		14	IN1.3	12	L11
Grey		15	IN1.4	13	L12
Pink		16	IN1.5	14	L13
Blue		17	IN1.6	15	L14
Red		18	IN1.7	16	L15
Black		19	nc	nc	nc
Violet		20	nc	nc	nc

Data Notes

Note

If less than 3 channels are used simultaneously, the maximum current per conductor is 2 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L. If more than 3 channels are used simultaneously, the maximum current per conductor is 0.75 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	16 digital inputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Compatibility

Schneider

Schneider TSX	TSX DEY 16A2 TSX DEY 16A3 TSX DEY 16A4 TSX DEY 16A5 TSX DEY 16D3
---------------	--

Connection data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Connector	WAGO 231 Series
Pole number 1	10
Connection type 1	System
Wire cross-section	0.34 mm ²

Connection 2

Connector 2	WAGO 231 Series
Pole number 2	10
Connection type 2	System

Connection 3

Connector 3	Schneider TSXBLY01
Pole number 3	20
Connection type 3	System

Subject to changes. Please also observe the further product documentation!



Physical data

Cable length	1 m
--------------	-----

Material Data

Weight	331 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

Product Group	30 (WAGO France)
---------------	------------------

ETIM 8.0	EC000237
----------	----------

ETIM 7.0	EC000237
----------	----------

PU (SPU)	1 pcs
----------	-------

Country of origin	FR
-------------------	----

GTIN	4045454876173
------	---------------

Customs tariff number	85444290900
-----------------------	-------------

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

pdf Download

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

545.9 kB

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3057/100-100

URL Download

System cable; for Schneider TSX; 16 digital inputs for higher voltages; Length: 1 m; Conductor cross-section: 0.34 mm²

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.