

### **Mounting Option**

03-.116 (2.95) I.D. Floating Eyelets

#### **Contact Detail**

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing





# **See Accompanying Pages for:**

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**



	0.330 [8.38] Card Slot
.160 [4.06] Point of Contact	
	SECTION A-A

837 Ser	ies High Temp Card Edge Connector
Part Nu	mber: 887-010-500-103



SCALE: NTS	SHEET	1 OF 4
DRAWING NUMBER		ISSUE
837 Assembly		1

J.LEE

837 ENG MASTER


DATE: OCT. 06/09

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER


ISSUE NUMBE

ORIGINAL

1

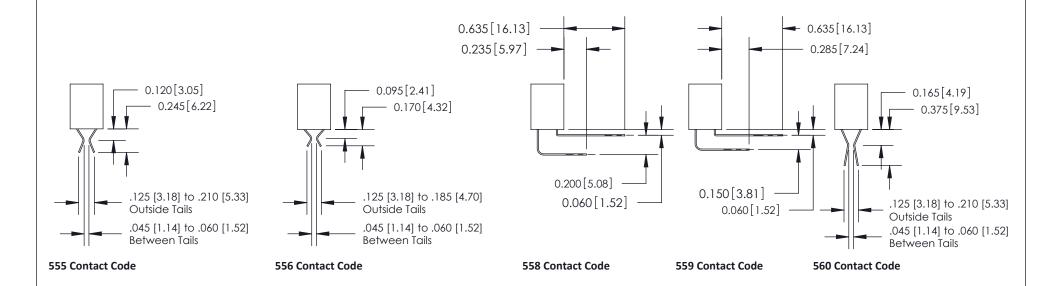

837 Series High Temp Card Edge Connector Contact Bend Detail		ACAD REFERENCE NO. 837 ENG MASTER			
		DRAWN: J.LEE	DATE: OCT. 06/09		
		CHECKED:	DATE:		
TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED	SCALE: NTS	SHEET :	2 OF 4		
	DRAWING NUMBER	•	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	837 Assembly		1	

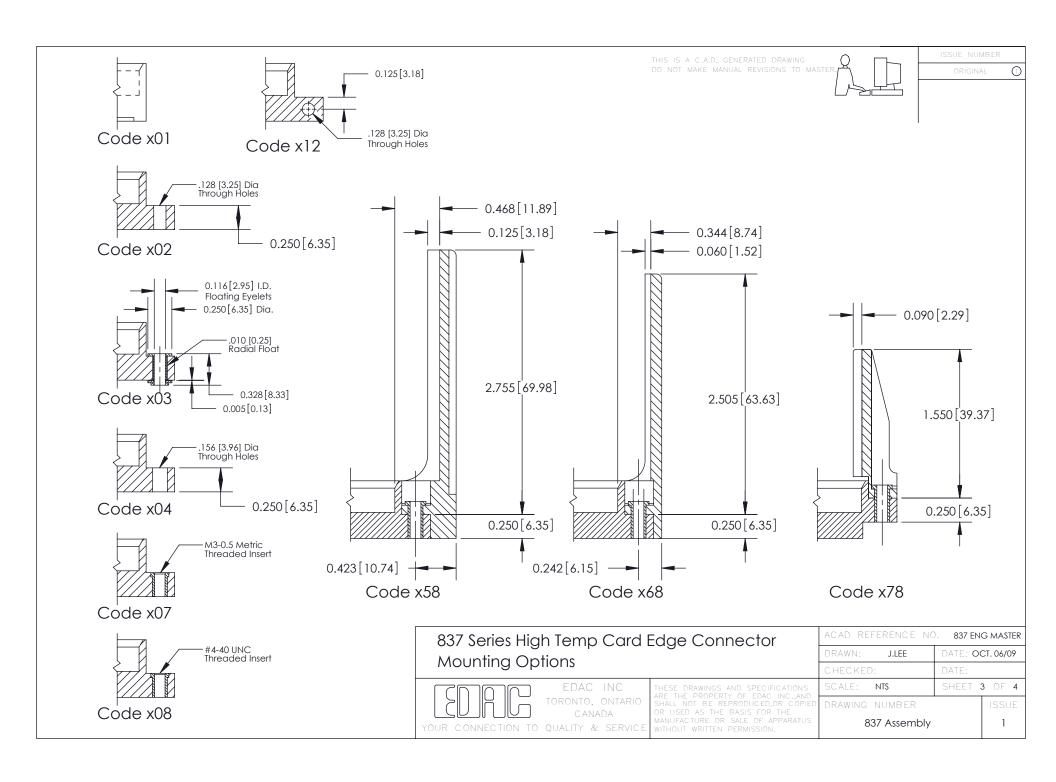



### **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

	837 Series High Temp Card Edge Connector		ACAD REFERENCE NO. 837 ENG MASTER			
Features and Specifications		DRAWN:	J.LEE	DATE: OC	CT. 06/09	
	realises and specifications		CHECKED:		DATE:	
	COOO EDAC INC	THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET .	4 OF 4
	TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE  ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIE OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING	NUMBER		ISSUE	
		MANUFACTURE OR SALE OF APPARATUS	8	37 Assembly		1