
| т | ۵ | н п | m | 0 |
|---|---|------------|---|---|
| | | | | |





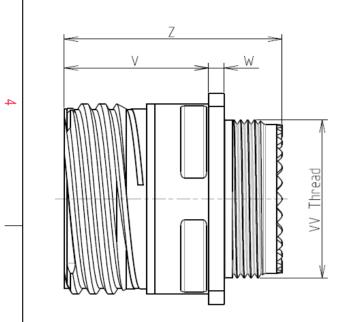

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Aluminium | | | |
|--------------------------------------------------|----------------------------------------|--|--|--|
| -Shell Plating | : Black Zinc Nickel | | | |
| -Insulator | : Thermoplastic | | | |
| -Contacts | : Copper Alloy | | | |
| -Seals & Grommet | : Silicon Elastomer | | | |
| -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | |
| -Durability | : 500 Mating cycles | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| -Temperature Range | : -65°C to +175°C | | | |
| -Salt Spray | : 500 hours | | | |

: 24.88 g ± 10%

8D 0

G

15

Ζ

05

S


F

А

| Connector dimension | | | |
|---------------------|---------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| PP | 4.39±0.2 | | |
| R1 | 24.61 | | |
| R2 | 23.01 | | |
| S | 31±0.3 | | |
| V | 20.83+0/-1.25 | | |
| W | 2.1/2.5 | | |
| Z | 31.5 Max | | |
| VV THREAD | M22x1-6g | | |

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

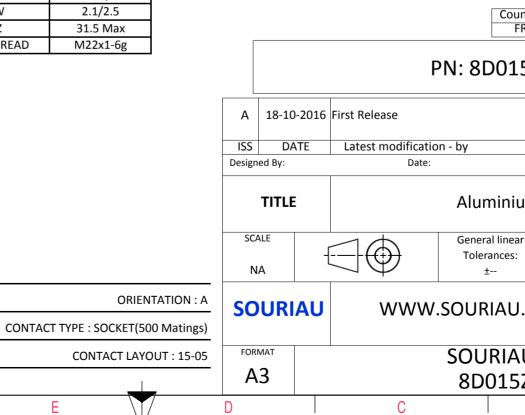

| | Φ | | A | | |
|------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------|--------|---|
| | | | | | |
| | | | | | 4 |
| | | | | | |
| AS EXA | AMPLE | | | | 3 |
| any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.) | | | | | |
| untry FR | Jurisd | liction & Cor Not Listed | | | 2 |
| .5Z05SA | | | | | |
| | | | | MOD N° | |
| | | CUSTOM | ER DRAWING | | |
| um | um Receptacle 8D series | | | | |
| ar : | | | / PROJECT 859 | | |
| J.CC | .COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | 1 |
| | DRG N° | l | | SHEET | |
| 5Z0. | 5SA-C | | A | 1/2 | J |
| | D | I | A | | |
| | | | | | |

| | | ۵ | וד | m | D | | C | |
|----------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|---|--------------------|-------------|-----------------------------------------------|--------------------------------------------------------------------------------------|
| | | Contact Layout | | | | | | Panel Cutou |
| 4 | - J Cont | x + y + y + y + y + y + y + y + y + y + | | | | SQUARE | E FLANGE RECEPTACLE (T REAR MOUNTING R1 | YPE O) |
| | A B C D E Shell Arrangement size no. cor | X-axis (mm) Y-axis (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61) | | | | | | ØT |
| ယ | | | | | | | | Dim ØA ØAA R1 ØT |
| | | | | | | | | |
| | | | | | | | due to a use o the Specifications i | ot be liable for any of the Products wh issued by either of nal recommendat |
| 0 | | | | | | | | Countr FR |
| | | | | | A 18- | 10-2016 Fir | | N: 8D0152 |
| | | | | | ISS Designed By | | Latest modification Date: | 1 - by |
| | | | | | тіт | LE | | Aluminium |
| <u> </u> | | | | | SCALE NA | | | General linear Tolerances: ± |
| | | | | | SOUF | RIAU | WWW. | SOURIAU.C |
| | | | | | FORMAT A3 | | | SOURIAU 8D015Z0 |
| | Н | G | F | E | D | | С | |

