

—	G	нт – – – – – – – – – – – – – – – – – – –	m	D	O O



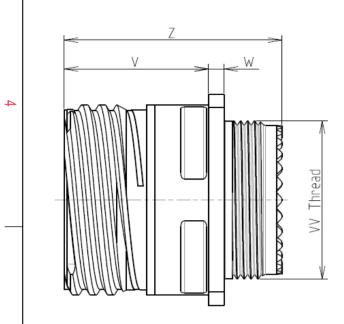

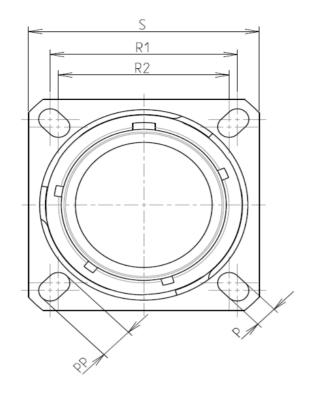

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	- 65℃ to +175℃			
-Salt Spray	: 500 hours			

: 35.93 g ± 10%

8D 0

G

17

Ζ

08

S

F

Е


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

CONTACT TYPE : SOCKET(500 Matings)

Е

CONTACT LAYOUT : 17-08

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

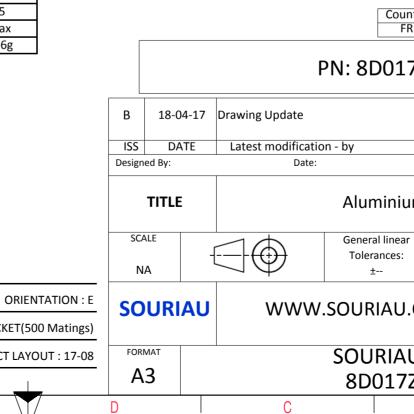

	σ		A			
					4	
		0			т —	
	1° (2	NAME OF THE OWNER				
		1				
		1				
S EXA	AMPLE				3	
	non-conformit					
	ch does not co he Parties or b		t y			
	on, technical n					
untry R					2	
	Not Listed					
.7Z08SE						
		CUSTON		MOD N°		
			R DRAWING			
um	n Receptacle 8D series					
ar	NPRDS / PROJECT					
	859 This document is the property of					
I.CC	.COM SOURIAU it must not be reproduced or					
	communicated without permission J DRG N°					
	BRG N 8SE-C			1/2		
	B		A		J	

		G	нт —	m		O	
		Contact Layout					Panel Cutor
4	-x ($ \begin{array}{c} \bullet^{+\gamma} \\ \bullet^{A} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{C} \\ \bullet^{+\chi} \\ \bullet^{K} \\ \bullet^{K$			Ter -	SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	
	Conta position A B C C D E	(mm) (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.086 (2.18) +.220 (5.84) 078 (1.98) +.094 (2.39) 216 (5.49)			4	Max. thickness panel for receptac	
ယ	F G H Shell Arrangement Nur size no. co	230 (5.84)078 (1.98) 128 (3.25) +.086 (2.18)				\$	Dim ØA ØAA R1 ØT
						SOURIAU shall not l due to a use of t the Specifications issu (professional	he Products w
2							Count FR I: 8D017
					B 18-04-1 ISS DATE Designed By:		by
_					SCALE NA		Aluminiun General linear Tolerances: ±
					FORMAT A3	S	OURIAU
	H	G	F	E	D	С	8D017Z

