



Electrical specifications

Center Frequency: 2259MHz
Ins. Loss @ Center Frequency: ≤ 2.4 dB
Passband: 2000-2518MHz
Passband Variation: ≤ 1.2 dB
VSWR Over Passband: $\leq 1.6:1$
Rejection: ≥ 60 dB @ 1259MHz
Rejection 2: ≥ 60 dB @ 2997-5000MHz
Rejection 3: ≥ 50 dB up to 10000MHz
Rejection 4: ≥ 40 dB up to 20000MHz
Impedance: 50 Ω


Mechanical

Mounting Method: Drop-in
Dimensions: 2.00" x 0.70" x 0.70"

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

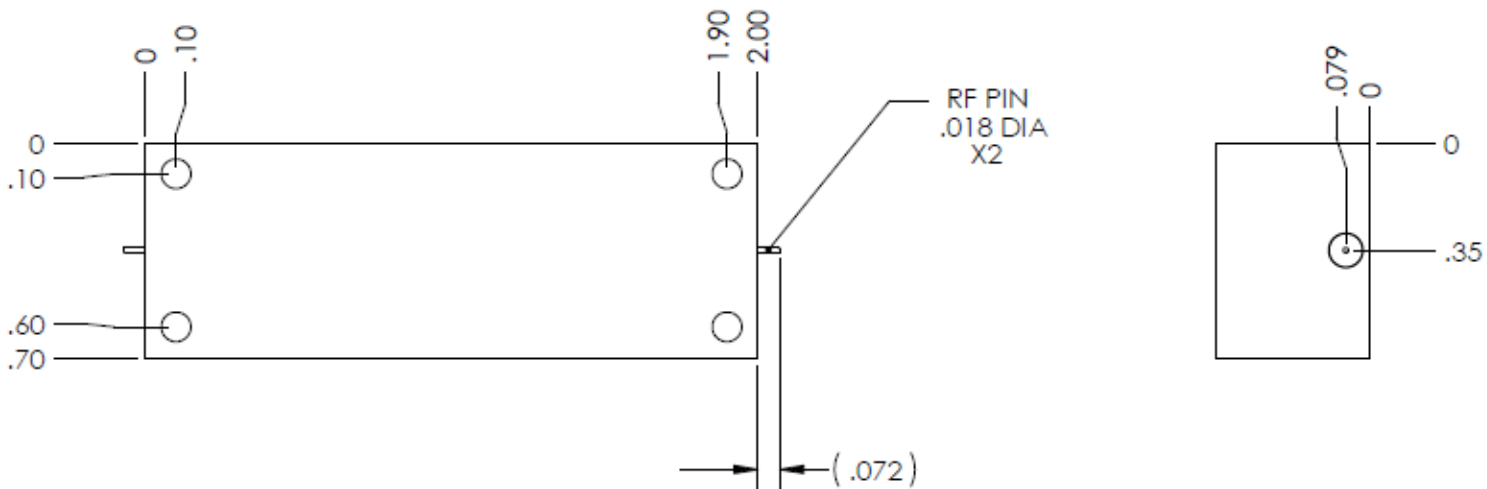



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2259MHz Bandpass Filter

Part Number: AE2259B11062



Plot:

