



	ISSUE NUMBER
ORIGIN	IAL

(1)

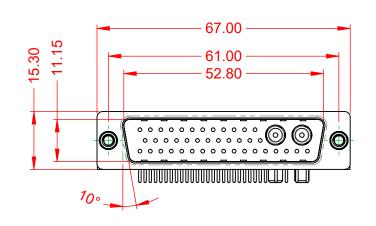




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY			
				DRAWN:	C.B	DATE: JAN. 01/2	019
				CHECKED:		DATE:	
		EDAC INC TORONTO, ONTARIO CANADA O QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE:	(IN C.A.D. 1:1)	SHEET 1 O	2
				DRAWING	NUMBER: 629-43W	2640-7T1	ISSUE
	YOUR CONNECTION TO QUALI			PART NUM	IBER: 629-43W	2640-7T1	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

