
			0	₩	>
	ØS				
CHARACTERISTICS	Keying Shown as example Connector dimension Dim Nominal		LAYOUT SHOWN AS EX.	AMPLE	
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer Contact Plating : Cold over conner Alloy 0.8um minimum	ØS32.5 MaxZ'31.5 MaxVV THREADM22x1-6g		SOURIAU shall not be liable for any due to a use of the Products whic the Specifications issued by either of t (professional recommendation) Country FR	ch does not comply with the Parties or by a third party on, technical notice.)	
 -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C 		A 19-10-2016	PN: 8D515M		
-Salt Spray : 2000 hours - Mass : 26.7 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	CUSTOMER DRAWIN	MOD N°
		TITLE Composite Plug 8D series			
SHELL TYPE : Plug with RFI Shielding	M 05 B N ORIENTATION :	- SOURIAU	General linear Tolerances: ± WWW.SOURIAU.CO	DM NPRDS / PROJECT 859 This document is the SOURIAL it must not be rep	J
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 15	CONTACT TYPE : SOCKET(500 Mating	1		communicated with	

	Ŧ	۵	г	m	D	0	
4		Contact Layout x + y + y + y + y + y + y + y + y + y +					
		X-axis (mm) Y-axis (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)					
S							
						SOURIAU shall not be liable due to a use of the Prod the Specifications issued by e (professional recom	lucts w either o
N					A 19-10-202	PN: 8D5	Count FR
					ISS DATE Designed By: TITLE	Latest modification - by Date:	
-					SCALE NA	General Tolerar ±	nces: -
					FORMAT A3	J WWW.SOURI SOUF 8D51	RIAU
	Н	G	F	E	D	C	

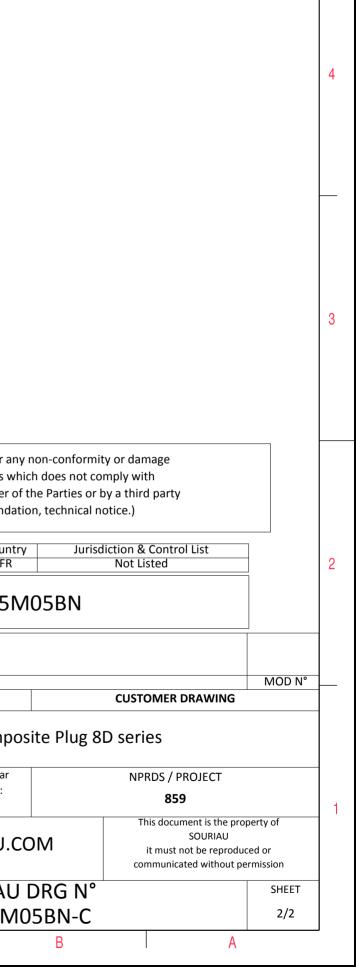

 \triangleright

σ