

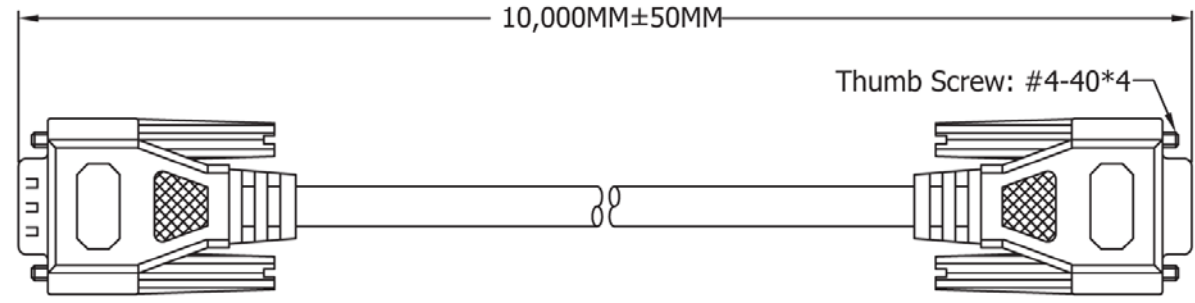



HDB 15 Male  
Plastic: Blue



HDB 15 Female  
Plastic: Blue



**PIN OUT**

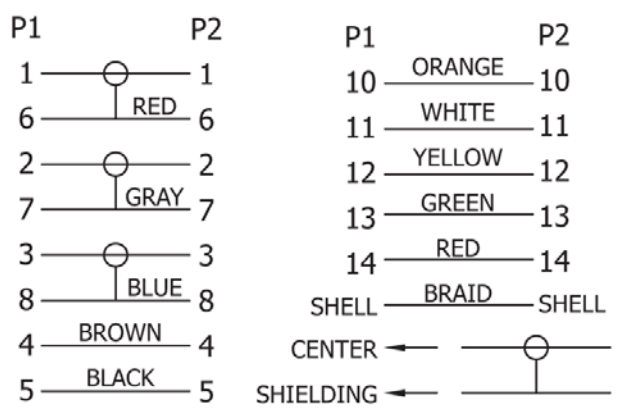

**Material:**

- CABLE:28AWG(7/0.127 T.C)\*3COAX(75 OHMS)+INSULATION:FO-PE+SPIRAL  
INNER JACKET:PVC OD: 2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)  
\*7C+INSULATION:SR-PVC ID: 0.9± 0.05mm(UL-1061)+AL/MYLAR+DRAIN  
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC  
COLOR:BEIGE, OD: 8.5± 0.15mm UL-2919 APPROVED
- CONNECTOR:  
P1:HDB 15P MALE,THE 9TH PIN IS EMPTY,GOLD FLASH CONTACT,  
NICKEL PLATED SHELL  
P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
- SHIELD:P1 & P2 COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- ELECTRICAL TEST:  
<1>.100% OPEN SHORT & MIS WIRE TEST  
<2>.CONTACT RESISTANCE 3 OHMS MAX  
<3>.INSULATION RESISTANCE 20M OHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING  
(HANKING SIZE MUST BE SMALLER THAN BLISTER)

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.16.11	<b>AK3750X</b>
X.X	±0.40				Approved		
X.XX	±0.25						Title
X.XXX	±0.15						Premium XGA Monitor Extension Cable - HD D-Sub 15 pin Male <=> Female, 10 Meters
Angle	±3°						Drawing No.
							<b>rev00</b>
							Replace
							Sheet

