

т	۵	п	m	0



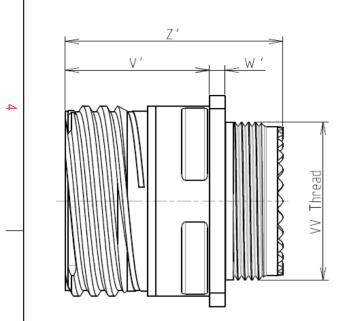

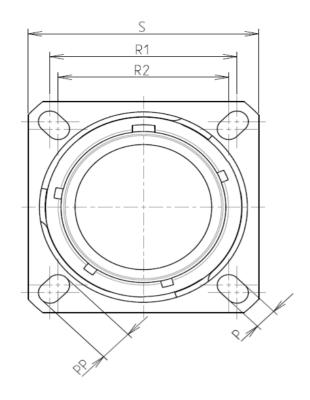

Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL TYPE : Square Flange Receptacle

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: −65°C to +175°C
-Salt Spray	: 2000 hours

: 9.3 g ± 10%

8D 0

11

-

J


02

Ρ

Α

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M15x1-6g			

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Turisdiction & Control List	D)		0		Φ	Þ		1
LAYOU' SHOWN AS EXAMPLE SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Image: the specification is superior to be a third party (professional recommendation, technical notice.) Image: the specification is a control List FR Image: the speci									4
due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				LAY	OUT SHOWN AS EXA	MPLE			3
A 14-10-2016 First Release ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING TITLE Composite Receptacle 8D series SCALE General linear NPRDS / PROJECT NA Tolerances: 859 1-02 FORMAT SOURIAU This document is the property of SOURIAU.COM FORMAT SOURIAU DRG N° SHEET				due to a use of the Specifications	of the Products which issued by either of th onal recommendation Country	n does not com ne Parties or b n, technical no	nply with y a third party tice.) ction & Control List		2
ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING TITLE Composite Receptacle 8D series SCALE General linear NPRDS / PROJECT NA Tolerances: 859 ± 859 NA WWW.SOURIAU.COM This document is the property of SOURIAU 1-02 FORMAT SOURIAU DRG N° SHEET	_			P	PN: 8D011J0)2PA			
SCALE General linear NPRDS / PROJECT NA Tolerances: 859 <u>x</u> : A SOURIAU WWW.SOURIAU.COM ngs) 1-02 FORMAT FORMAT SOURIAU DRG N° SHEET		ISS DATE Latest modific		Latest modification	n - by		CUSTOMER DRAWING	MOD N°	
NA Tolerances: ± 859 N: A ngs) SOURIAU WWW.SOURIAU.COM 1-02 FORMAT SOURIAU FORMAT SOURIAU DRG N°						Receptacle			
N:A SOURIAU WWW.SOURIAU.COM ngs) I-02 FORMAT SOURIAU DRG N°				$\square $	Tolerances:	olerances: 859			
		SOURIAU		WWW.SOURIAU.CO			SOURIAU it must not be reprodu	ced or	
		SOI							1

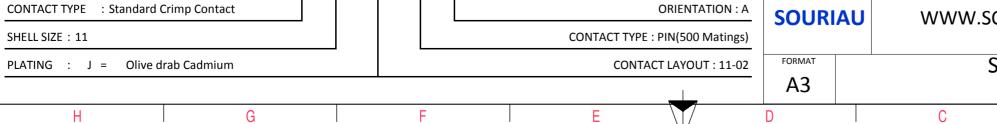

ſ	т	G		П	m	D	0
		Contact Layout					Panel Cuto
4	.× .0 (2.	+Y IB IA +Y +X +X 95 (2.4imm)				Γ. Σ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement size no. 11 -2	ion X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	Contact location All			V	
ω							ØA ØAA R1 ØT
	-						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda
N							Coun FR PN: 8D011
						A 14-10-2 ISS DAT Designed By:	2016 First Release E Latest modification - by Date:
<u> </u>						SCALE NA	General linear Tolerances:
						FORMAT	WWW.SOURIAU.
						A3	8D011J
	Н	G		F	E \	D	C

