ALISE-50-WW

~60° wide beam

SPECIFICATION:

Dimensions	Ø 49.5 mm
Height	25 mm
ROHS compliant	yes ⓘ

MATERIALS:

Component	Type	Material	Colour	Finish	Coating
ALISE-50-WW	Reflector	Aluminium	metal		Anodized

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16910_ALISE-50-WW » Box size: 370 x 320 x 210 mm	750	100	25	5.0

DATE
17.03.2020

Reflector

Socket

Isometric view
Scale: 1:1

1 0 -0.4

25 ±0.5 Height

2.6

Optical center

Isometric view
Scale: 3:2

Top view
Scale: 3:2

∅49.9 ±0.4

∅19.8 *1 -0.4

A

Front view
Scale: 1:1

A

COB LED
LES14.5mm Range (6-14.5mm)

Detail B
Scale: 2:1

Notes

🔴 PCB or heatsink level.
🟡 LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com
For more details about installation please see LEDiL Installation Guide on www.ledil.com

PART	TYPE	MATERIAL
C16907\C16908\C16909\C16910_ALISE-50	REFLECTOR	Aluminium

MECHANICAL DRAWING

PRODUCT **ALISE**

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

LEDiL®

SCALE 1:1	WEIGHT	A3 SHEET 1/1

See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):

STANLEY

LED	ZEUBE265 Series
FWHM / FWTM	71.0° / 79.0°
Efficiency	75 %
LEDs/each optic	1
Light colour	UV-C
Required components:	

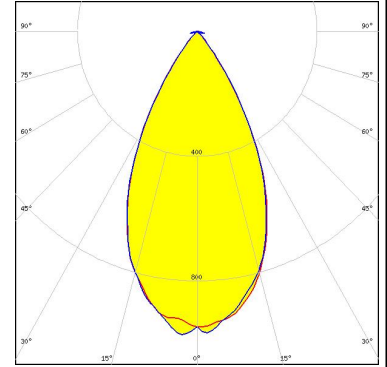The UVC LED result tolerance is ±10 %

OPTICAL RESULTS (SIMULATED):

CITIZEN

LED	CLL02x/CLU02x (LES10)
FWHM / FWTM	61.0° / 85.0°
Efficiency	86 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	
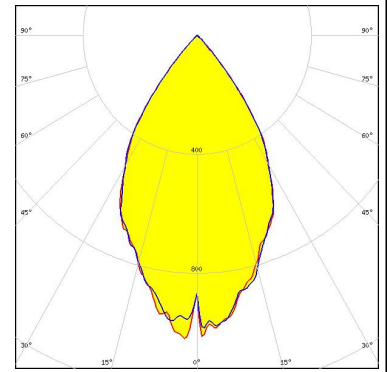
CITIZEN

LED	CLL02x/CLU02x (LES10)
FWHM / FWTM	54.0° / 78.0°
Efficiency	72 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	
C17099_ALISE-50-DL	

LUMINUS

LED	XFM-5050 4 Die
FWHM / FWTM	50.0° / 70.0°
Efficiency	88 %
LEDs/each optic	1
Light colour	UV-C
Required components:	

The UVC LED result tolerance is ±10 %

SEOUL SEMICONDUCTOR
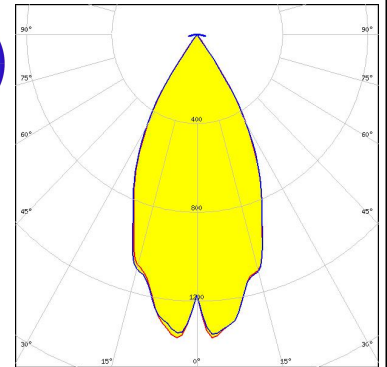
LED	WICOP DY9560-27
FWHM / FWTM	52.0° / 73.0°
Efficiency	88 %
LEDs/each optic	24
Light colour	UV-C
Required components:	
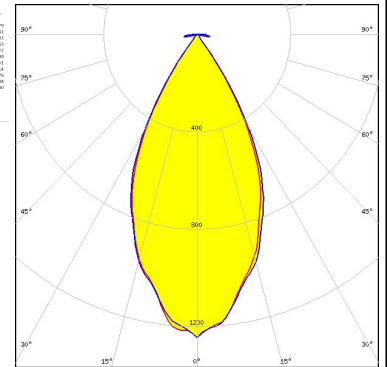
The UVC LED result tolerance is ±10 %

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.