



### Electrical specifications

**Center Frequency:** 1.3 GHz  
**Insertion loss @Fc:** 2.3 dB max  
**Flatness <0.1 dB P-P Max:** 1294-1306 MHz  
**Input/Output VSWR:** 1.5:1 max from 1294-1306 MHz  
**Insertion loss variation over:** 1.0 dB max  
**Attenuation 1:** 65 dBc@DC-1280 MHz  
**Attenuation 2:** 40 dBc@1289 MHz  
**Attenuation 3:** 40 dBc@1313 MHz  
**Attenuation 4:** 65 dBc@1318 MHz-2230 MHz  
**Input Power:** +20 dBm


### Mechanical

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** N Female  
**Dimensions:** 8.36" X 4.26" X 1.37" in

### Environmental

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz

### Outline Drawing:

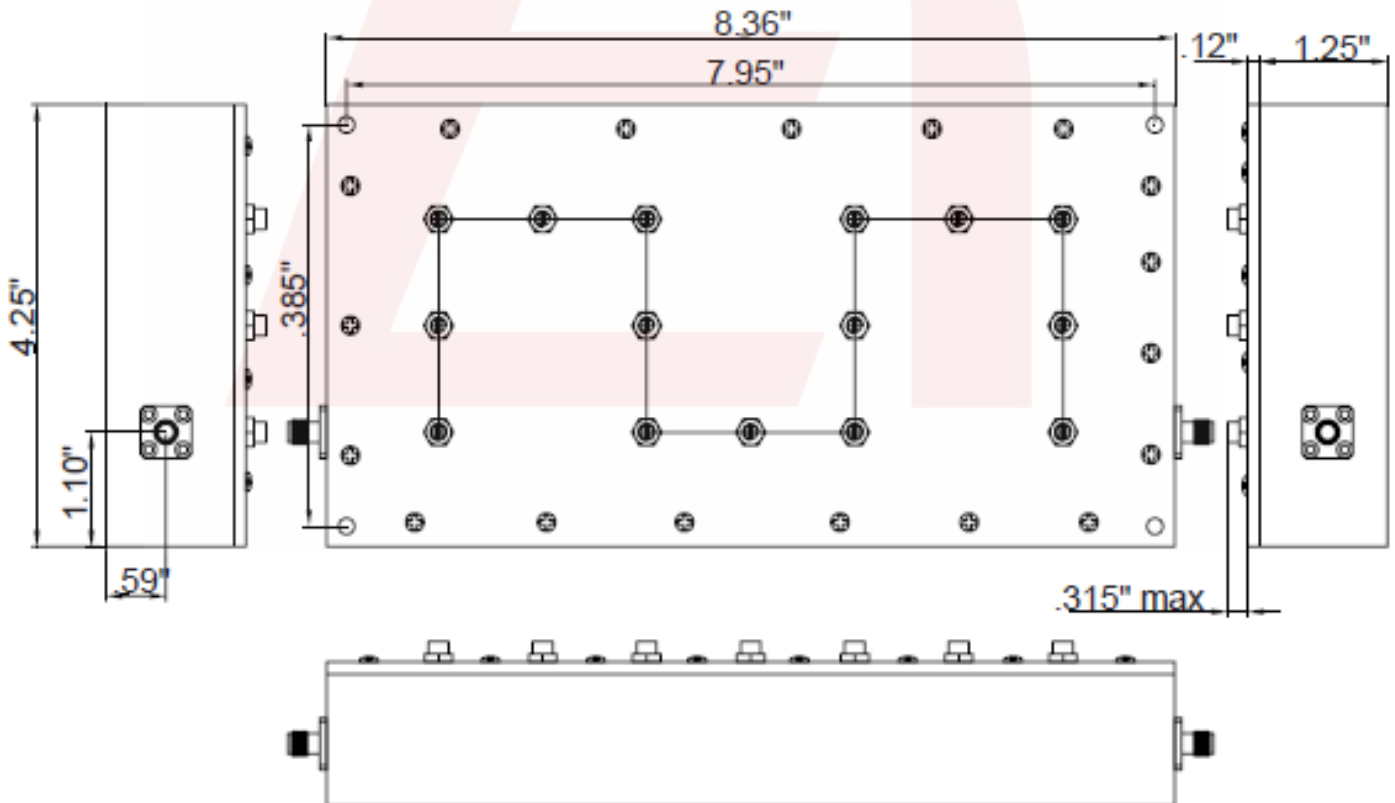



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 1300 MHz Cavity Bandpass Filter

**Part Number: AB1300B467**



**Plot:**

