


RECOMMENDED CARD LAYOUT
SCALE 2:1

- NOTES:
1. MATERIAL: UL 94V-0 NYLON, GLOW WIRE CAPABLE.
 2. FINISH: N/A
 3. THIS PRODUCT CONFORMS TO MOLEX PROD. SPEC. PS-08-50.
 4. PACKAGING: BULK, PER PK-2574-001
 5. CONNECTOR TO BE USED WITH CRIMP TERMINALS:
2478-x: 18-24 GA. WIRE, .110/(2.79) MAX INSULATION DIAMETER.
2578-x: 22-26 GA. WIRE, .065/(1.65) MAX INSULATION DIAMETER.
 6. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN ONE HALF THE TOTAL TOLERANCE.
 7. CIRCUIT 1 I.D. PRESENT ON ALL PARTS. LAST CIRCUIT I.D. MAY OR MAY NOT BE PRESENT.
 8. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

SECTION A-A

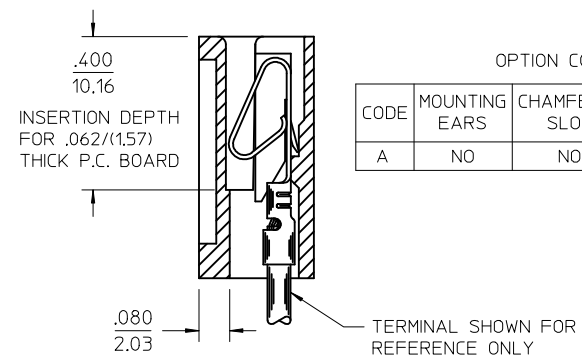

2574 - N * * BK A
NO. OF CIRCUITS
UL 94V-0 NYLON

CODE	MOUNTING EARS	CHAMFERED SLOT	PCB THK	MOUNTING HOLES
A	NO	NO	.062	NO

OPTION CODE

COLOR CODE
BK=BLACK

- RIB LOCATION CODE (BETWEEN CKTS)
- 1 = NONE
 - 2 = 2-3
 - 3 = 3-4
 - 4 = 5-6
 - 5 = 3-4, 5-6
 - 6 = 4-5, 7-8
 - 7 = 5-6, 8-9
 - 8 = 5-6, 10-11
 - 9 = 4-5, 7-8, 11-12
 - 10 = 5-6, 10-11, 14-15
 - 11 = 5-6, 10-11, 15-16
 - 12 = 5-6, 11-12, 16-17
 - 13 = 5-6, 11-12, 17-18
 - 14 = 4-5, 7-8, 11-12, 15-16
 - 15 = 4-5, 8-9, 12-13, 16-17, 20-21
 - 16 = 5-6, 11-12, 18-19

2574-NA*					
PART NO.	ENG. NO. (SUFFIX ONLY)	NO. OF CKTS	DIM A	DIM B	DIM C
09-01-6229	-22A12BKA	22	3.562 (90.47)	3.276±.011 (83.21±0.25)	3.596 (91.34)

<p>NOTE 7</p> <p>EC NO: UCP2015-0556</p> <p>DRWN: JDOX 2014/08/07</p> <p>CHKD: JHK/PPR 2014/08/08</p> <p>APPR: FSM/TH 2014/08/29</p>	<p>QUALITY SYMBOLS</p> <p>▽=0</p> <p>▽=0</p> <p>▽=0</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p> <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .---</td> <td>± .---</td> </tr> <tr> <td>3 PLACES</td> <td>± .---</td> <td>± .010</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td>± .015</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.36</td> <td>± .---</td> </tr> <tr> <td>0 PLACE</td> <td>±</td> <td>±</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	± .---	± .---	3 PLACES	± .---	± .010	2 PLACES	± 0.25	± .015	1 PLACE	± 0.36	± .---	0 PLACE	±	±	<p>DIMENSION STYLE</p> <p>IN/MM</p> <p>DRAWN BY: LSCHEMIDT DATE: 2005/06/03</p> <p>CHECKED BY: ADERR DATE: 2005/06/13</p> <p>APPROVED BY: FSMITH DATE: 2005/06/14</p>	<p>SCALE</p> <p>DESIGN UNITS</p> <p>INCH</p>	<p>THIRD ANGLE PROJECTION</p>
		mm	INCH																				
	4 PLACES	± .---	± .---																				
	3 PLACES	± .---	± .010																				
2 PLACES	± 0.25	± .015																					
1 PLACE	± 0.36	± .---																					
0 PLACE	±	±																					
<p>ANGULAR ±1/2°</p> <p>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p>		<p>MATERIAL NO.</p> <p>SEE CHART</p>	<p>TITLE</p> <p>EDGE CARD CONNECTOR (3.96)/.156 CENTER CRIMP TYPE - 2574 SERIES</p>																				
<p>SIZE</p> <p>C</p>		<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>			<p>DOCUMENT NO.</p> <p>SD-2574-001</p>																		
<p>REV</p> <p>A2</p>		<p>SHEET NO.</p> <p>1 OF 1</p>			<p>DATE</p> <p>2012/01/11</p>																		