



REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
NA	2010/05/11	A	INITIAL RELEASE	LUCLY
CY11-5360	2010/08/27	B	CHANGE CUSTOMER VERSION FROM 'A00' TO 'A01'(LABEL)	LUCLY

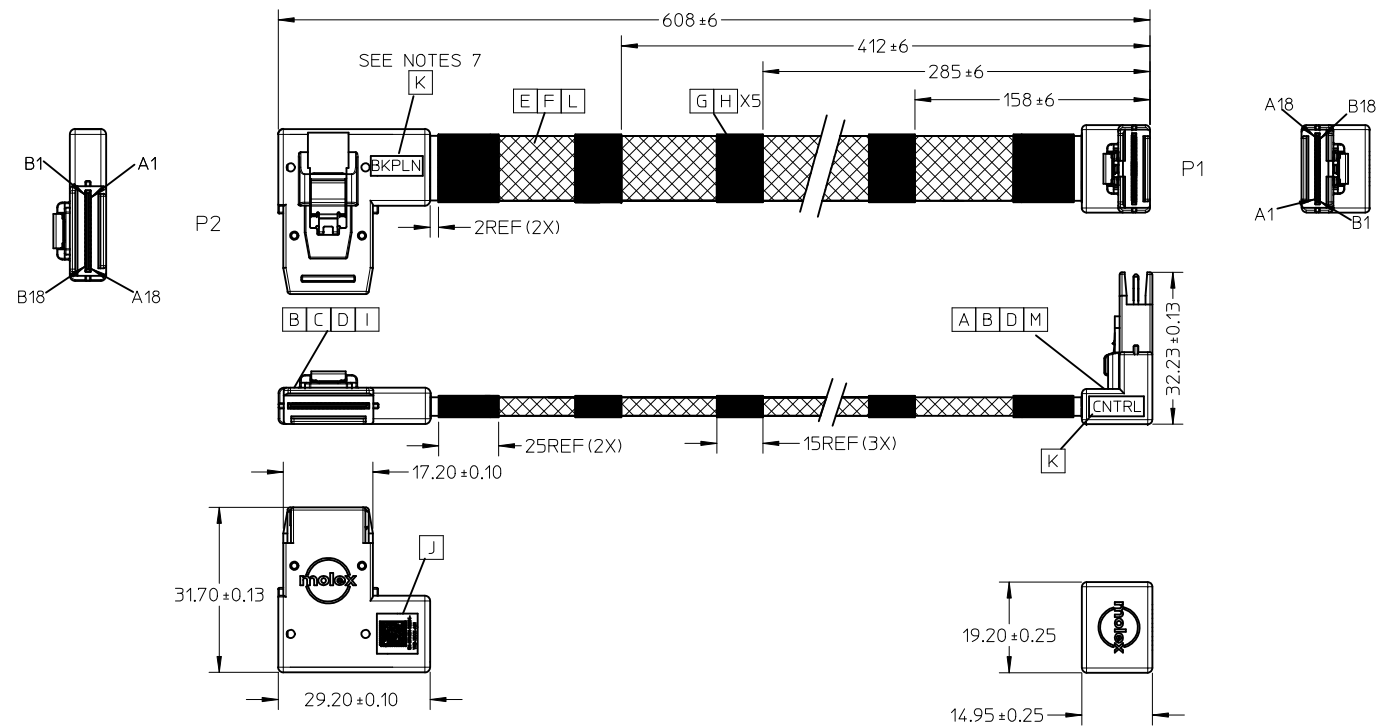


READING AS: CN0R145M52204YMDXXXXA01

LABEL FORMART DETAIL

IPASS™ IS A TRADEMARK OF MOLEX

ENTER DESCRIPTION EC NO: USY2011-0248 DRWN: ZYU 2010/10/11 CHKD: W. LUCKY 2010/10/11 APPR: BLAU 2010/10/11	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± ---	mm INCH DRAWN BY ZYU CHECKED BY W. LUCKY APPROVED BY BLAU MATERIAL NO. 1110963006	DATE 2010/10/11 DATE 2010/10/11 DATE 2010/10/11 DATE 2010/10/11	TITLE 36CKTIPASS RT ANG LFT EXIT-RT ANG .608M			
		ANGULAR ± --- °			MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DOCUMENT NO. SD-111096-3006		SHEET NO. 1 OF 3	

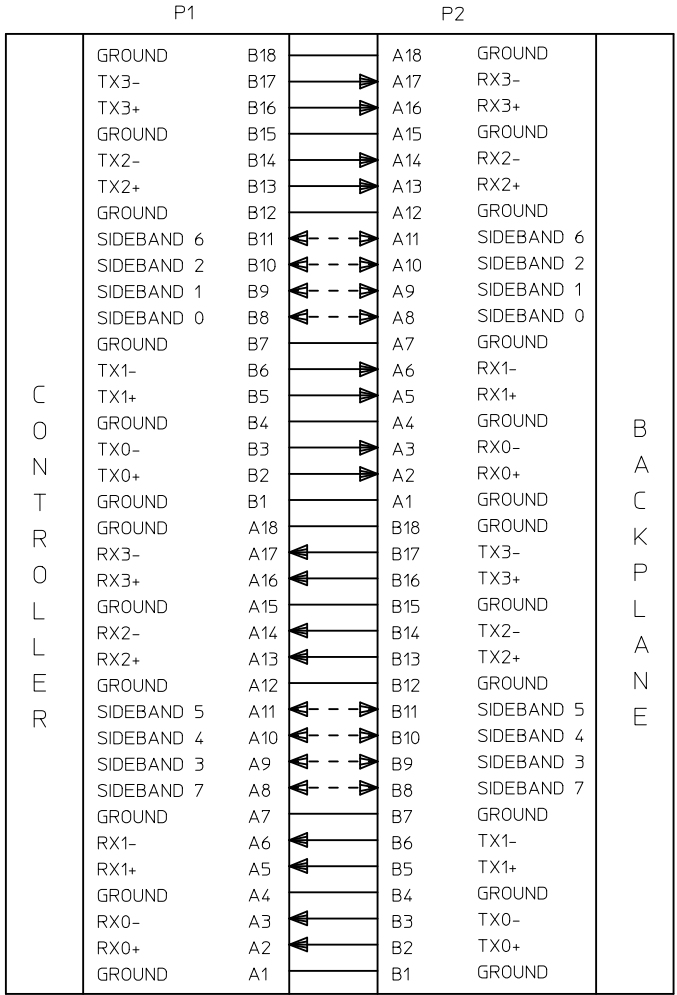

NOTE:
1. ALL SIGNAL GROUNDS ARE BUSSED IN PCB.

IPASS IS A TRADEMARK OF MOLEX.


ITEM	DESCRIPTION	L (mm)	QTY.
M	lpass R/A Latch		1PCS
L	1P*30AWG:SHLD:FEP:BU:0.90*2.21MM:Twin-ax	586REF	8PCS
K	Blank label 5x10mm Thermal Transfer		2PCS
J	Blank Label 0.375"*0.375" Brady# B-423		1PCS
I	pcb 36CKT lpass R/A wider trace		1PCS
H	HST F 10MM 125C (UL) BLK	A/R	5PCS
G	KUNJIE ACETATE CLOTH TAPE 12MM BLACK	A/R	5PCS
F	Braid sleeving OD:9.5mm Black HF	563REF	1PCS
E	8C*30AWG:TS:GY:P=1.0MM:UL2651	586REF	1PCS
D	PE G812 LDPE NATURAL		A/R
C	lpass Latch(Local vender)		1PCS
B	PBT POLYESTER 30% GF BLACK UL94V-0		A/R
A	PCB for 36ckt Latch Inside		1PCS

ENTER DESCRIPTION EC NO: USY2011-0248 DRWN: ZYYU 2010/10/11 CH'KD: W. LUCKY 2010/10/11 APPR: BLAU 2010/10/11	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± ---	mm INCH	DRAWN BY ZYYU	DATE 2010/10/11	TITLE 36CKTIPASS RT ANG LFT EXIT-RT ANG .608M			
		ANGULAR ± --- °		CHECKED BY W. LUCKY	DATE 2010/10/11	APPROVED BY BLAU			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 1110963006	DATE 2010/10/11	DOCUMENT NO. SD-111096-3006	SHEET NO. 2 OF 3		

NOTES

1. IPASS INNERMOLD WITH PE RESIN;
IPASS OUTERMOLD WITH PBT RESIN;
2. THIS PRODUCT MUST MEET EU CHEMICAL SUBSTANCE SPECIFICATION FOR PRODUCTS(EU 2002/95/EC RoHS).
3. FOR IPASS END ASSEMBLY PLS REFERS TO E-74562-010 FOR DETAIL.
4. THE PRODUCT ELECTRICAL PERFORMANCE AND MECHANICAL PERFORMANCE REFER TO SAS 2.0 INDUSTRIAL STANDARD
5. MECHANICAL PERFORMANCE REFER TO PS-75783-001.
6. RECOMMENDED MINIMUM BEND RADIUS IS 28MM.
7. TEXT NEED USE FONT ARIAL AND THE TEXT SHOULD BE 3MM MIN.
8. LABEL DETAIL
 - 8.1 FOR LABEL DETAIL PLEASE REFER TO DELL SPECIFICATION NUMBER:
13190 REV. A28-00 TYPE W
 - 8.2 LABEL FORMART:
CN-OR145M-52204-YMD-XXXX-A01
 - 8.3.TEXT NEED USE FONT VERDANA AND THE TEXT SHOULD BE 3PT MINIMUM.
9. CABLES-REFERENCE DOCUMENTS
DN362 SPEC,ENG,STD,DFE
6T198 SPEC,DFE, RESTRICTED-MTL
13190 SPEC, SPLR, BRCD, LBL.(USE IF SHIPPED DIRECTLY TO DELL)
ENG0000116 DOC, PROC, CABLE, ENG
ENG0000117 SPEC, PRCS, QUAL, CBL, ELEC
ENG0000121 DOC, PROC, PPAP, CBL, ENG
ASME Y14.5M-1994 DIMENSIONING AND TOLERANCING

PS:
DELL LABEL SPEC(13190 A28-00) EXTRACT
EVERY SECTION SEE DETAIL REMARK:
CN-OR145M-52204-YMD-XXXX-A01



- (A) ORIGINAL COUNTRY
 - (B) DELL P/N
 - (C) MFG ID
 - (D) DATE CODE
1.FIRST CHARACTER IS YEAR CODE: LAST NUMBER OF THE YEAR.
2.SECOND CHARACTER IS MONTH CODE. SEE CHART.
- | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| JAN | FEB | MAR | APR | MAY | JUN | JUL | AUG | SEP | OCT | NOV | DEC |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C |
- 3.3RD CHARACTER IS DAY CODE: 1ST -- 9TH = 1 -- 9 AND 10ST -- 31ST = A -- V.
 - (E) SERIAL NUMBER.
XXXX (DELL SERIAL NUMBER): SUPPLIERS WILL BE ALLOWED THE USE OF CHARACTERS 0-9, A-0IN THE FIRST POSITION OF THE SEQUENCE NUMBER, WITH NO RESTRICTIONS ON THE 2NDTHROUGH 4TH POSITIONS PROVIDED THAT EACH SEQUENCE NUMBER IS INDEED UNIQUE.
 - (F) P/N REV

ENTER DESCRIPTION EC NO: USY2011-0248 DRWN:ZYU 2010/10/11 CHKD:W.LUCKY 2010/10/11 APPR:BLAU 2010/10/11	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																
			<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± ---</td> <td>± ---</td> </tr> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± ---	± ---	1 PLACE	± ---	± ---	DRAWN BY: ZYU CHECKED BY: W.LUCKY APPROVED BY: BLAU DATE: 2010/10/11	TITLE 36CKTIPASS RT ANG LFT EXIT-RT ANG .608M			
			mm	INCH																			
		4 PLACES	± ---	± ---																			
3 PLACES	± ---	± ---																					
2 PLACES	± ---	± ---																					
1 PLACE	± ---	± ---																					
	ANGULAR ±---°	MATERIAL NO. 1110963006	MOLEX MOLEX INCORPORATED	DOCUMENT NO. SD-111096-3006	SHEET NO. 3 OF 3																		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				