

ITEM	PART#	DESCRIPTION	QTY	UOM
A	436400300	MicroFit 3.0 Plug SR Pnl Mnt 3Ckt	1	PC
B	430310021	MICROFIT 3.0 M CRP TERM CHN TIN 18AWG	3	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X18AWG DISC SR-PVC BK UL10002	BLACK

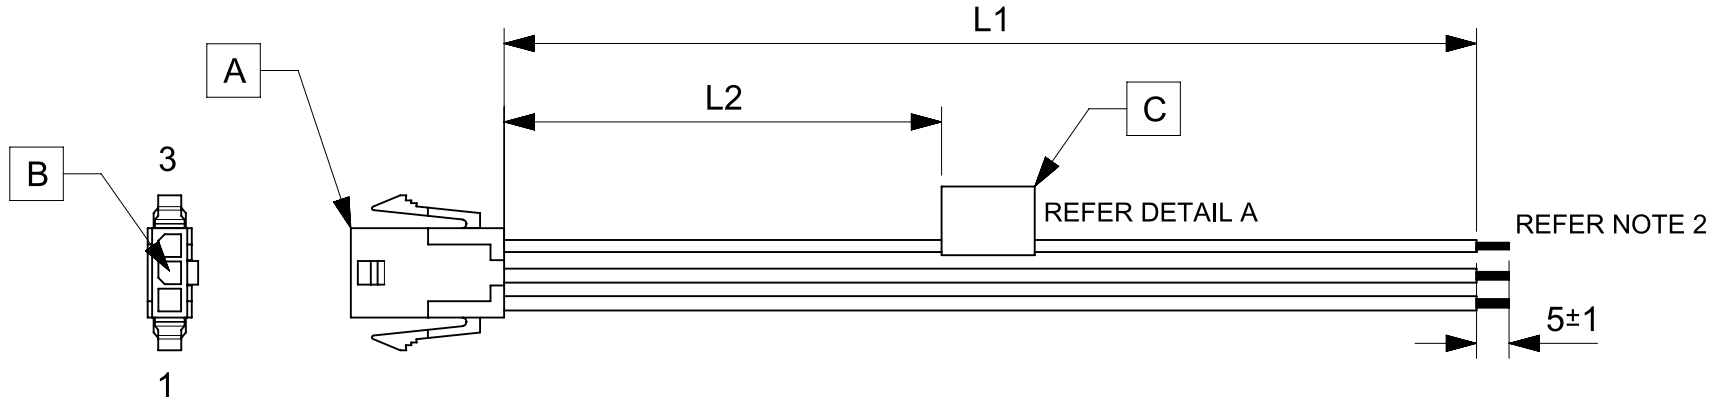


TABLE			
PART NUMBER	L1	L2	TITLE
2147531031	150±8	63 REF	MICROFIT 3.0 SR P-S 3CKT 150 MM Sn
2147531032	300±10	138 REF	MICROFIT 3.0 SR P-S 3CKT 300 MM Sn
2147531033	600±10	288 REF	MICROFIT 3.0 SR P-S 3CKT 600 MM Sn

NOTES

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.55mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

PRE-RELEASE
REFERENCE
USE ONLY

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:				
∇ = 0	mm	NTS		EC NO: 637489 DRWN: ARAJU 2020/02/29 CHK'D: RDESAI01 2020/05/14 APPR: RDESAI01 2020/05/14 INITIAL REVISION: DRWN: ARAJU 2020/02/29 APPR: RDESAI01 2020/05/14						
∇ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)									
∇ = 0	ANGULAR TOL ± °									
∇ = 0	4 PLACES	±								
∇ = 0	3 PLACES	±								
∇ = 0	2 PLACES	±								
∇ = 0	1 PLACE	±		DOCUMENT NUMBER		DOC TYPE		DOC PART		
∇ = 0	0 PLACES	±		2147531031		PSD		000		
∇ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING		SERIES		
∇ = 0			A4-SIZE		214753		MATERIAL NUMBER		CUSTOMER	
						SEE TABLE		GENERAL MARKET		
								SHEET NUMBER		
								1 OF 1		

RELEASE STATUS	P1	RELEASE DATE	2020/05/14	03:37:11
----------------	----	--------------	------------	----------