


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13

ISSUE NUMBER

ORIGINAL

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER. .XXX ±0.10

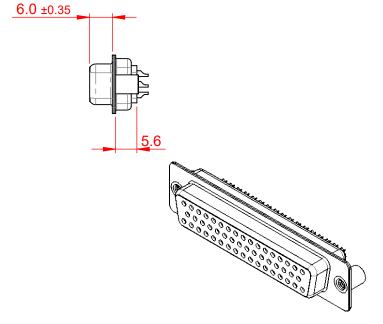

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

500V AC for 60s

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, 30µ" GOLD PLATED

OPERATING

VOLTAGE:

TEMPERATURE: -55°C to +85°C

CURRENT RATING: 5A PER CONTACT CONTACT RESISTANCE: 15mΩ MAX. INSULATOR RESISTANCE: $1000M\Omega$ min.

628 SERIES D-SUB CONNECTOR





THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 628 ASSEMBLY	
DRAWN: C.B	DATE: AUG. 01/2018
CHECKED:	DATE:
SCALE: 1:1	SHEET 1 OF 1
DRAWING NUMBER: 628-050-622-249	

DRAWING NUMBER: 628-050-622-249 ISSUE PART NUMBER: 628-050-622-249