



|--|

ISSUE NUMBER	
ORIGINAL	

(1)

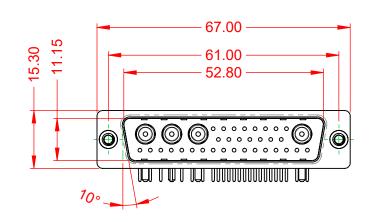




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:

.XX ±0.13 .XXX ±0.05

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:


10A (CURRENT)

-55°C ~ 125°C

 $10m\Omega$ MAX.

5000MΩ min.

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/2019	9	
		CHECKED:	DATE:		
0	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
ES CY.	TORONTO, ONTARIO CANADA NOUD CONNECTION TO CHALITY & SEDVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-36W4250-1N2		ISSUE
51.		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		4250-1N2	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY

