

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0780120011](#)

Status: **Active**

Overview: Serial Attached SCSI (SAS) Connectors

Description: 1.27mm Pitch, Serial Attached SCSI Combo Device Plug, Vertical, Surface Mount, 29 Circuits, Plastic Locating Pegs, Pick-and-Place Cap, Embossed Tape on Reel, Lead-Free

Documents:

[3D Model](#)

[Product Specification PS-78012-002-001 \(PDF\)](#)

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [78012](#)
Application Board-to-Board
Comments With Cap, With Cap
Component Type Plug
Electrical Model Yes
Overview Serial Attached SCSI (SAS) Connectors
Product Name SAS 6G
Type N/A
UPC 822350343053

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 14, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Plug
Lock to Mating Part None
Material - Metal Brass
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 1.750/g
Number of Rows 2
Orientation Vertical
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 1.57mm
Packaging Type Embossed Tape on Reel
Panel Mount Yes
Pitch - Mating Interface 0.80mm, 1.27mm
Pitch - Termination Interface 0.80mm, 1.27mm
Plating min - Mating 0.762µm
Plating min - Termination 1.905µm
Polarized to Mating Part Yes
Polarized to PCB Yes
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -40° to +85°C

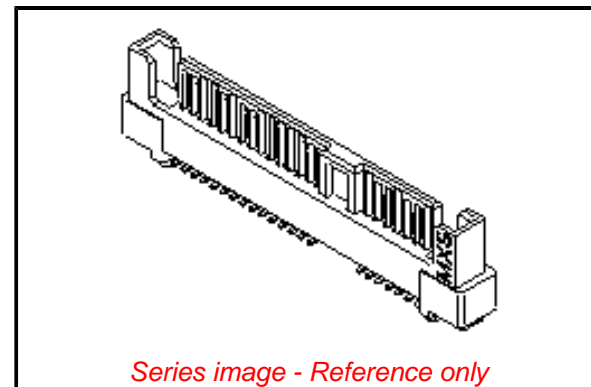

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Contained Per
-ED/01/2018 (15
January 2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[78012 Series](#)

Mates With

[78011](#) SATA Receptacle, SFF 8482
Unshielded Dual Port Serial Attachment
Connector

Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Electrical Model Document	EE-78012-002, EE-87863-006, EE-87863-007
Product Specification	PS-78012-002-001
S-Parameter Model	SP-78012-002
Sales Drawing	SD-78012-101

This document was generated on 07/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION