

_					
_	<u>دی</u>	11	111	0	0



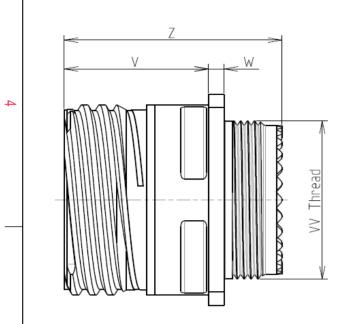



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium	
	-Shell Plating	: Olive drab Cadmium	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
	-Durability	: 500 Mating cycles	
	-Delivered with Souriau contacts and Accessories		
	-Temperature Range	: -65°C to +175°C	
	-Salt Spray	: 500 hours	

: 44.66 g ± 10%

8D 0

G

19

W

11

S


F

E

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M28x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

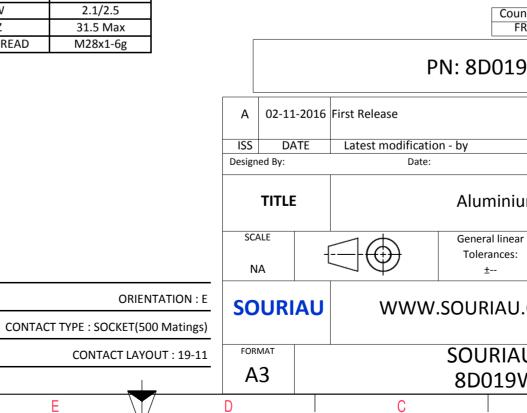

	Β		A					
ις Εγγ	AMPLE							
s whic er of t	non-conformit ch does not co che Parties or t on, technical n	mply with by a third part otice.)						
untry FR	Jurisd	liction & Cont Not Listed	rol List		2			
9W	W11SE							
				MOD N°				
		CUSTOME	R DRAWING					
um	n Receptacle 8D series							
ar :	NPRDS / PROJECT 859							
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
				SHEET				
VV	L1SE-C B		A	1/2	J			

