

MATERIAL NUMBER


120086-0390

OLD PART NUMBER

405007B09M020

FINISHED LENGTH

6.56' +3.50" -0 [2.0M +88.9mm -0]

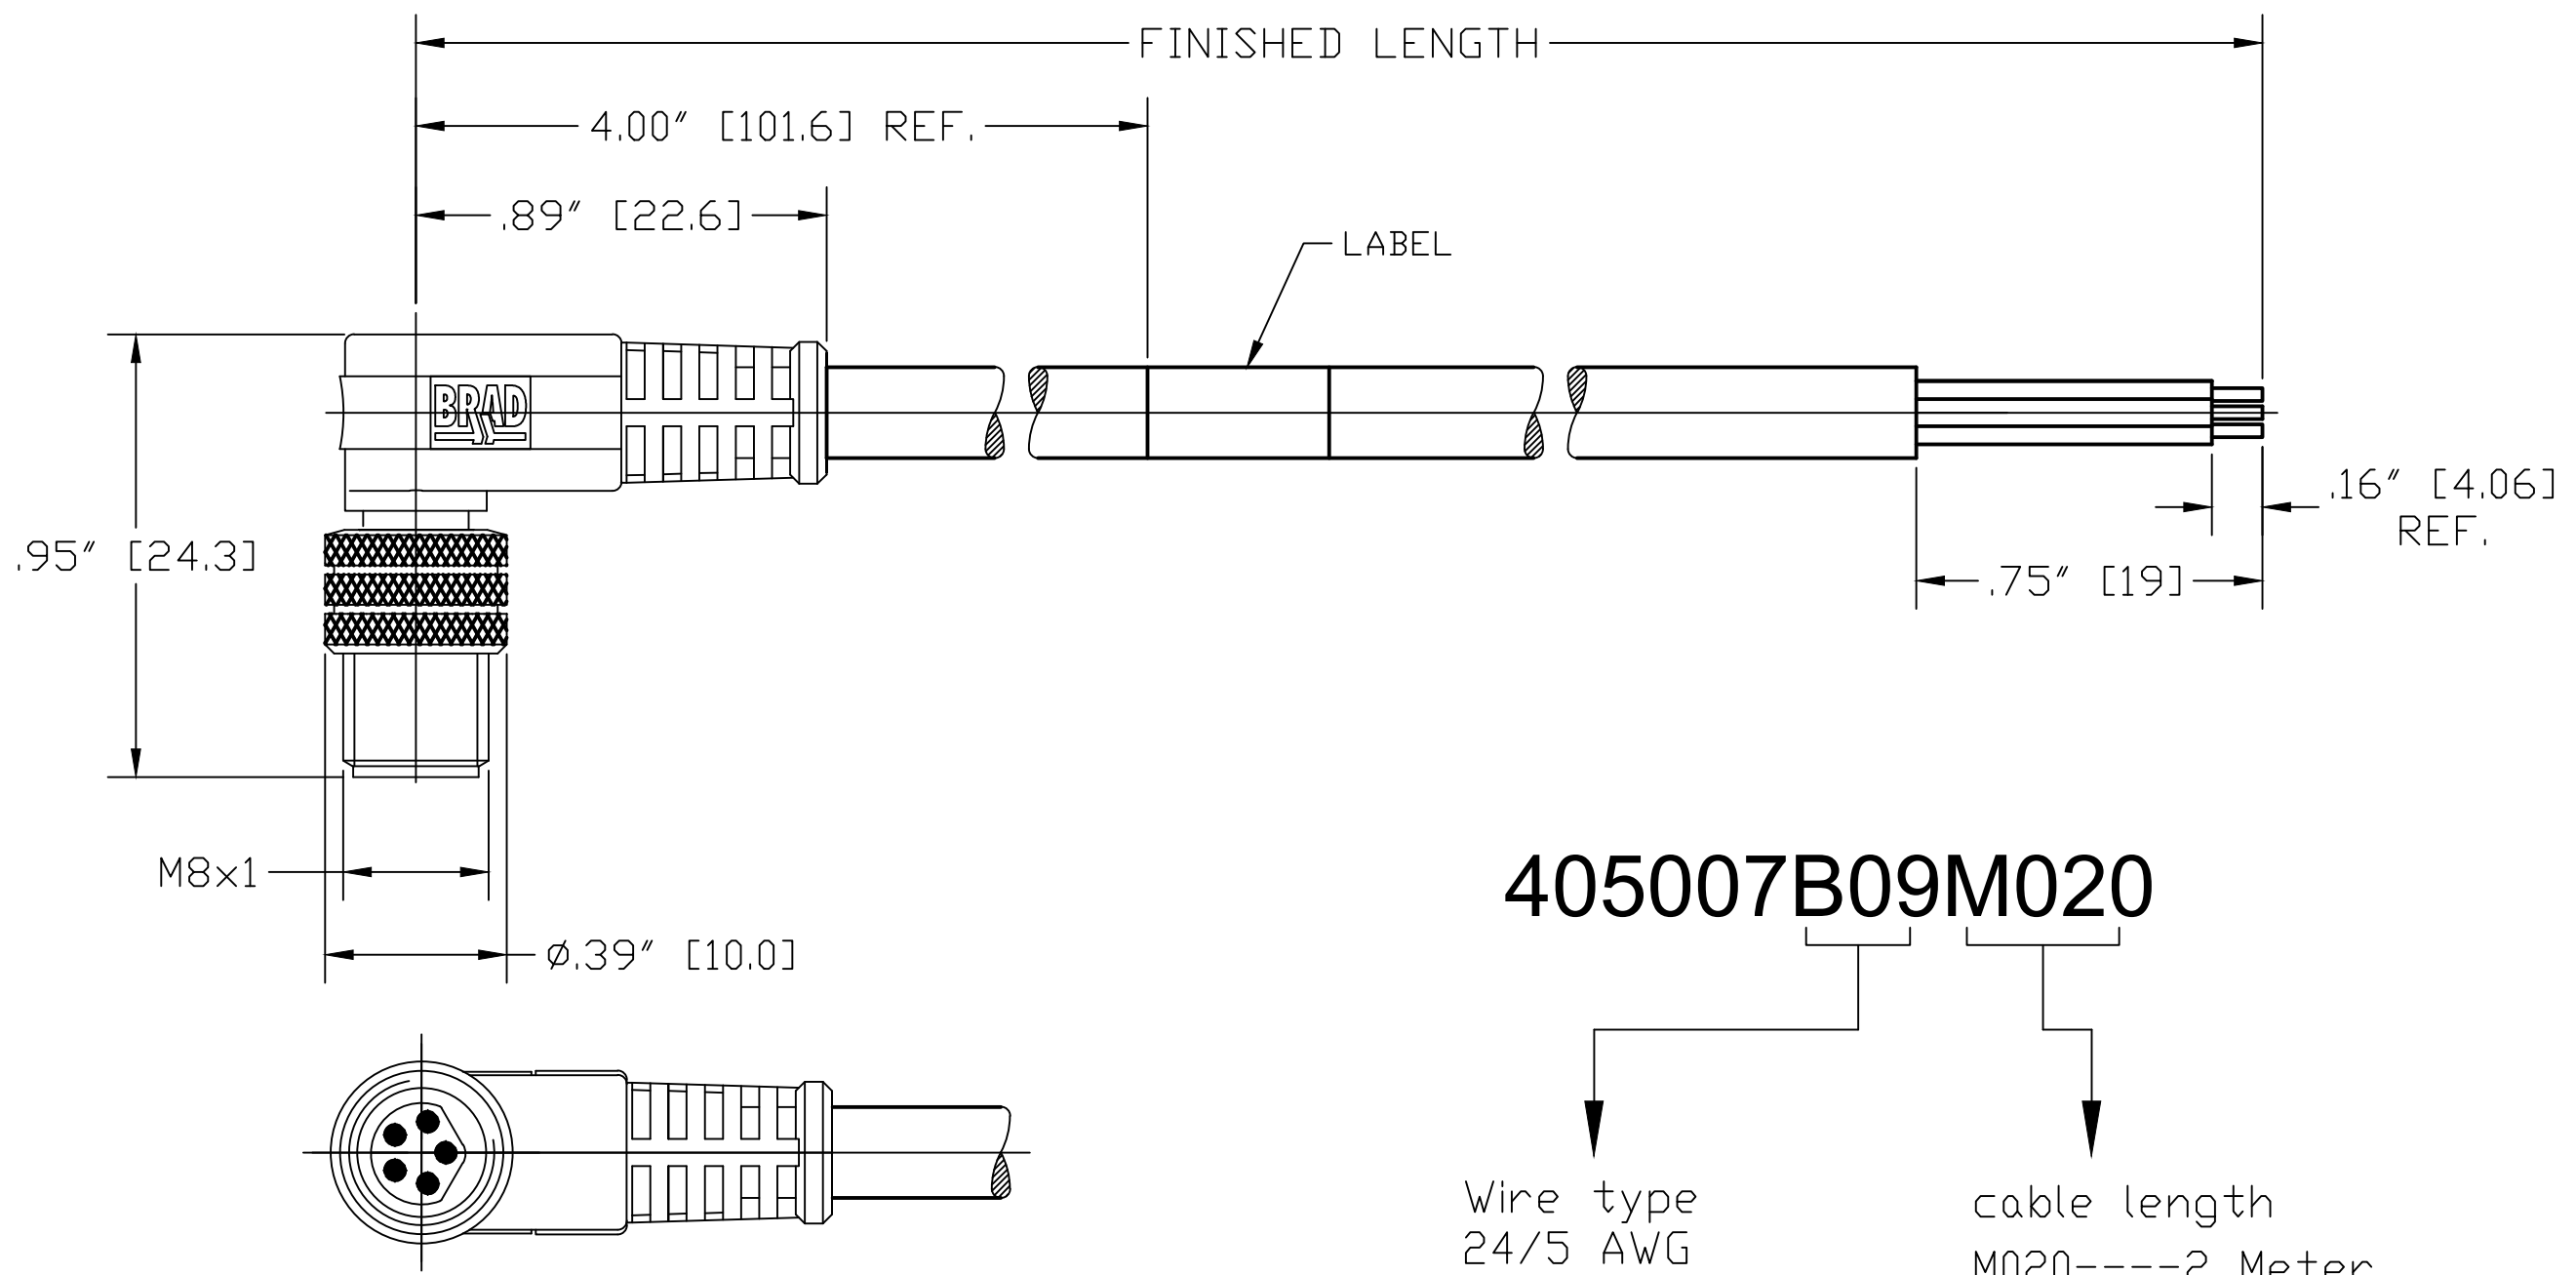


P1	
1	BROWN
2	WHITE
3	BLUE
4	BLACK
5	GRAY

WIRING DIAGRAM

405007B09M020

Wire type
24/5 AWG
Black PUR

cable length
M020----2 Meter
M100----10 Meter

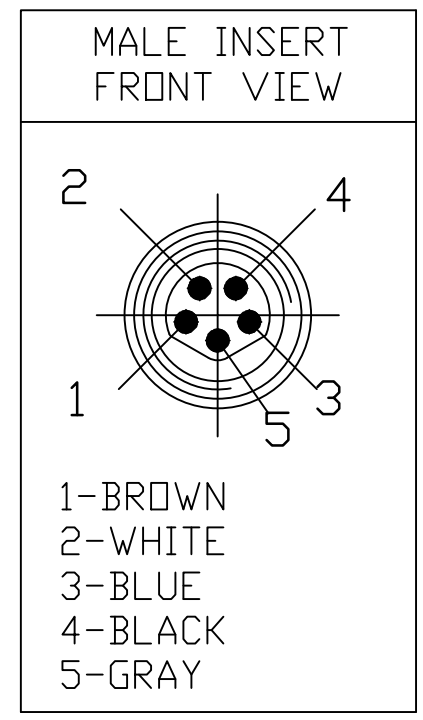

CONTACT:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	PUR, BLACK
COUPLING NUT:	NICKEL PLATED BRASS
MOLDED BODY:	RITFLEX, YELLOW
VOLTAGE RATING:	60 VAC/ 75 VDC
AMPERAGE RATING:	3 AMPS
PROTECTION:	IP67
OPERATING TEMPERATURE:	-20°C TO 80°C
CERTIFICATIONS:	CULUS LISTED, FILE NO. E152210

INITIAL RELEASE EC NO.: IFC2013-1910 DRWN: EBRACKEN 2013/06/20 CH'KD: RSTONE APPR: BWOODMAN2013/08/14 REV	QUALITY SYMBOL ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.010 1 PLACE ±0.25 ±.020 ANGULAR ±.5°	DIMENSION STYLE IN/MM DRAWN BY DATE EBRACKEN 2013/06/18 CHECKED BY DATE RSTONE APPROVED BY DATE BWOODMAN 2013/08/14	SCALE --- DESIGN UNITS INCH THIRD ANGLE PROJECTION	TITLE NANO-CHANGE ASSEMBLY 5 POLE M/MP 90D COUP. #24/5 BLACK PUR MOLEX INCORPORATED MOLEX DOCUMENT NO. SD-120086-035 SHEET NO. 1 OF 1
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
			SIZE C		