




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)





## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED


-55°C ~ 125°C


1000V AC rms

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:

POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

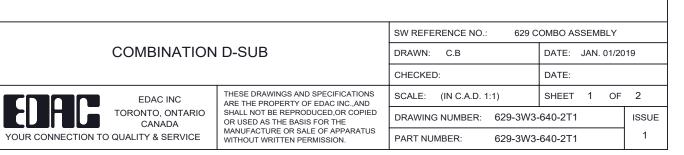



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

