


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25




ISSUE NUMBER

ORIGINAL

(1)





NOTES:

.XX ±0.13 .XXX ±0.05


MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628W21W1624-4N2		ISSUE
			PART NUMBER: 628W21V	V1624-4N2	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



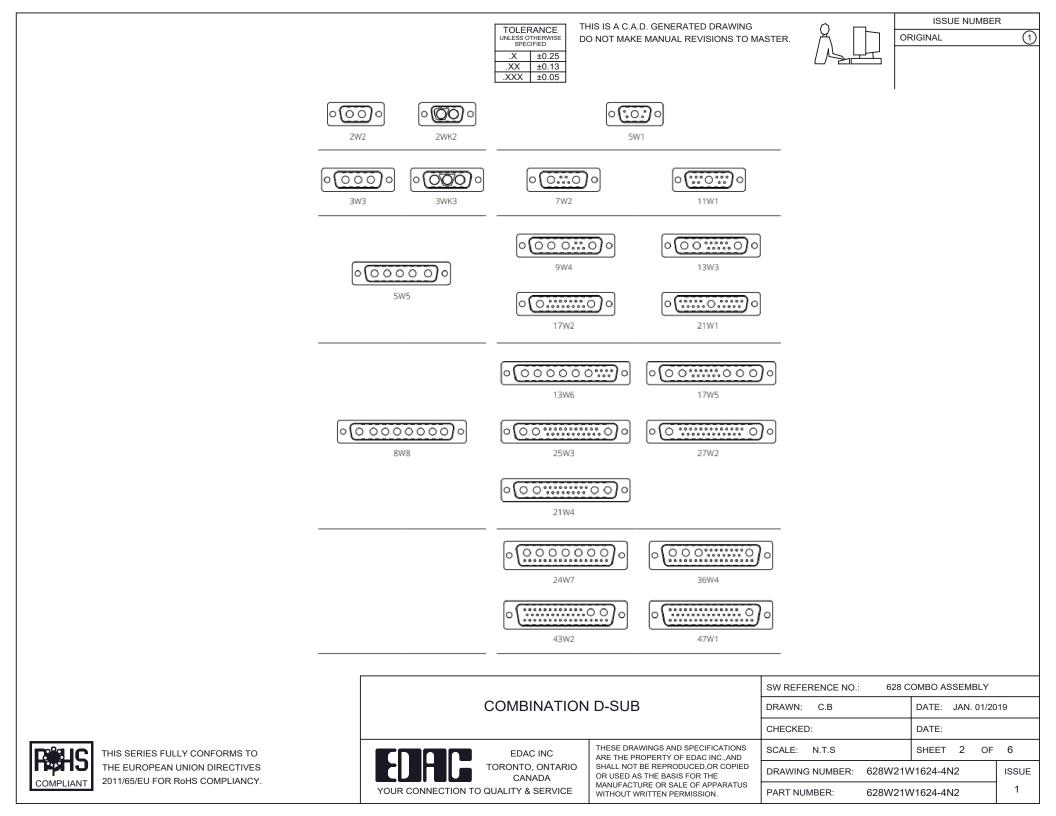

ISSUE NUMBER THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05





3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





 $\overline{(1)}$

21W4 Male/Female



27W2 Male/Female



21W1 Male/Female


16.62

30A / 3.7 40A / 4.2
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

	SW REFERENCE NO.: 628 COMBO ASSEMBLY				
COMBINATION	DRAWN: C.B		DATE: JAN. 01/20)19	
		CHECKED:		DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S		SHEET 3 OF	4
TORONTO, ONTARIO	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER:	628W21V	V1624-4N2	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER:	628W21V	V1624-4N2	1

5W5 Male

5W5 Female



47.05

23.53


CURRENT RATING / ØA 10A / 2.2 20A / 3.3

8W8 Male


8W8 Female

31.76


22.83




22.97



11W1 Male/Female



23.63 8.31 9.70







THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25







25W3 Male










36W4 Female



13W3 Male










30.50 20,70 16,62 13.72 15.24 6.74 2.77

13W6 Male



43W2 Male






.XX ±0.13 .XXX ±0.05


9W4 Female

13W3 Female



43W2 Female

47W1 Female





17W5 Male

COMPLIANT









		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 628W21	V1624-4N2	ISSUE
			PART NUMBER: 628W21	V1624-4N2	1

2.77

