

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	1

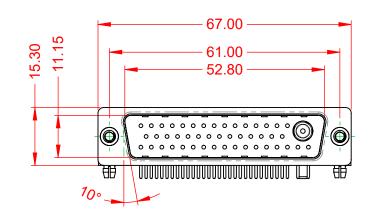




.X ±0.25 .XX ±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

1000V AC rms



	COMBINATION D-SUB			SW REFERENCE NO.: 629 COMBO ASSEMBLY						
COMBIN				DRAWN: C.B		DATE: JAN. 01/20		1/201	019	
				CHECKED:		DATE:				
EDAC IN		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE:	(IN C.A.D. 1:	1)	SHEET	1	OF	2	
	TORONTO, ONTARIO CANADA SHALL NOT BE REPRODUCED, OF OR USED AS THE BASIS FOR THE	E BASIS FOR THE	DRAWING NUMBER: 629-47V			W1240-2N3			ISSUE	
YOUR CONNECTION TO QUALITY & SE		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		/BER:	629-47W	1240-2N3	3		1	



R#HS
COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

