


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.





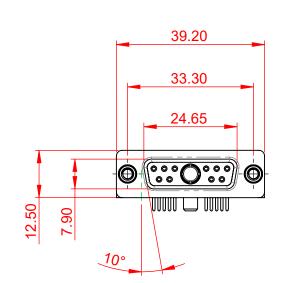





NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05

MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-11W1250-4TE		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-11W	1250-4TE	1





ISSUE NUMBER ORIGINAL (1)

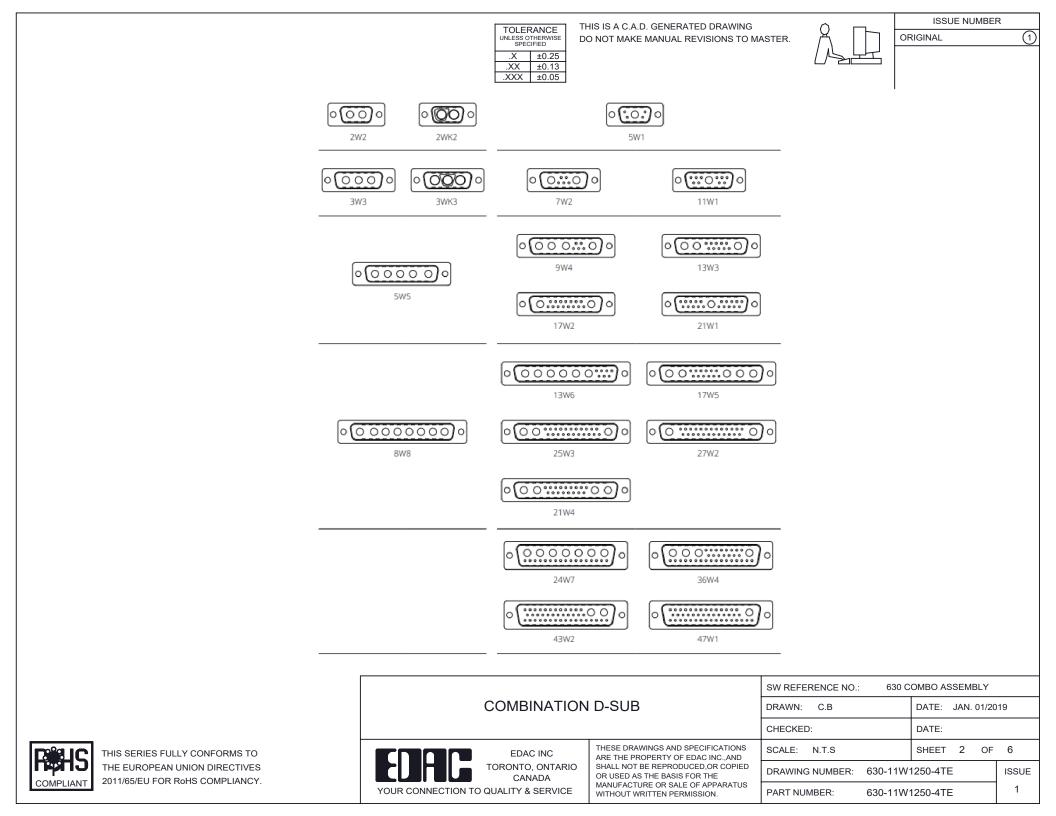



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female

17W2 Male/Female





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE




PCB EDGE

2.77 PCB EDGE

27W2 Male/Female

21W4 Male/Female




21W1 Male/Female




				SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B		DATE: JAN. 01/20)19	
			CHECKED:		DATE:		
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S		SHEET 3 OF	4
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-11W1250-4TE		ISSUE		
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER:	630-11W	1250-4TE	1	


5W5 Female

COMPLIANT





8W8 Female






CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2







TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

23.36


PCB EDGE

PCB EDGE

31.75

21.9

36W4 Female



13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

.X±0.25.XX±0.13.XXX±0.05

43W2 Female





17W5 Male










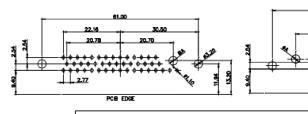


20.7

13.72

PCB EDGE

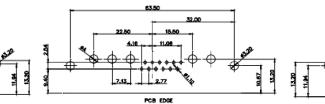



		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 4 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 630-11W1250-4TE		ISSUE
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.			PART NUMBER: 630-11W	1250-4TE	1