

	т	വ	н т	m		0
--	---	---	------------	---	--	---



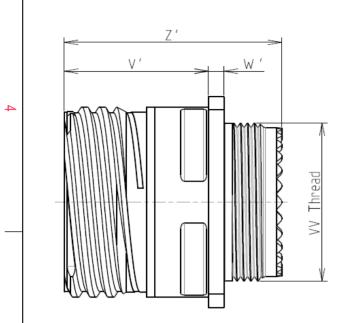

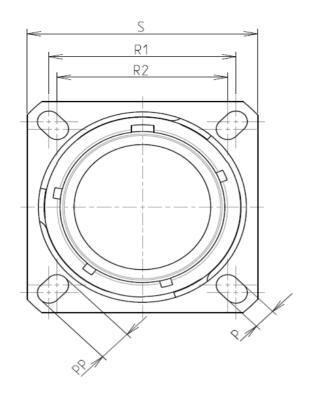

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souria	u contacts and Accessories				
-Temperature Range	65°C to +200°C				
-Salt Spray	: 2000 hours				
-Mass	: 11.8 g ± 10%				
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souria -Temperature Range -Salt Spray				

8D 0

G

11

Μ

02

S

F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : N

CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

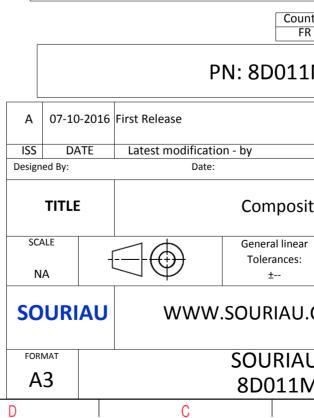

	Ξ		А			
		ß				
	0					
AS EXA	AMPLE				3	
r any non-conformity or damage s which does not comply with or of the Parties or by a third party						
er of the Parties or by a third party ndation, technical notice.)						
untry	y Jurisdiction & Control List					
FR		Not Listed			2	
1M	02SN					
		CHETCHET		MOD N°		
	CUSTOMER DRAWING					
site	e Receptacle 8D series					
ar :			/ PROJECT 859		1	
	This document is the property of					
J.CC	.COM SOURIAU it must not be reproduced or communicated without permission					
	J DRG N° SHEET				-	
MO	2SN-C			1/2]	
	В		А			

ſ	т	G		П	m	D	0	
		Contact Layout						Panel Cutou
4	.× .0 (2.	+Y IB IA +Y +X +X 95 (2.4imm)				ب ۷	SQUARE FLANGE RECEPTACLE (TYPE OR REAR MOUNTING	
	Shell Arrangement size no. 11 -2	ion X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	Contact location All			V		
ω							Ø ØA R Ø	йА АА 11
	-						SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products wh ed by either of recommendat
N							PN:	Countr FR 8D011N
						A 07-10-2 ISS DATE Designed By:	D16 First Release Latest modification - by Date:	ý
_ _						SCALE NA		eneral linear Tolerances: ±
						FORMAT		URIAU.C DURIAU
	Н	G		F	E	A3 D		D011M
						V		

