

Ŧ	G	н п	m	O



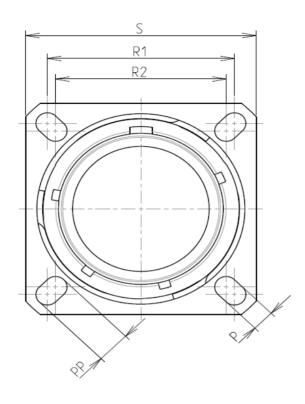



Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

21


S

42

А

F

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 31.75 R1 29.36 R2 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 31.5 Max Ζ

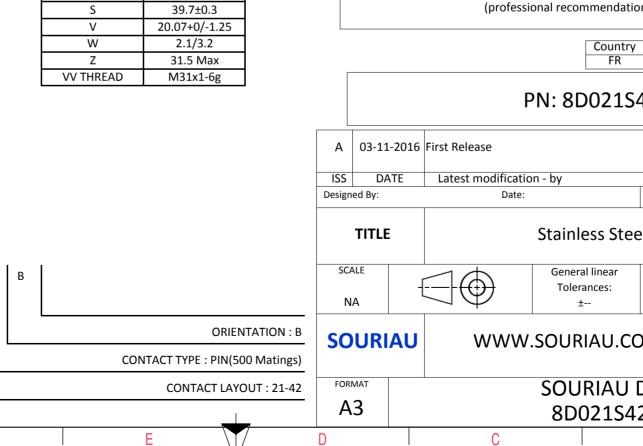

0		Φ		A		
						4
LAY	OUT SHOWN AS EXA	AMPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						
PN: 8D021S42AB						
Latest modificatio	n - by				MOD N°	
Date: CUSTOMER DRAWING Stainless Steel Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT 859			1
WWW.SOURIAU.COM This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission						
SOURIAU DRG N° SHEET 8D021S42AB-C 1/2						
С		В		А		

_	т	۵	н т	т	D		0	
		Contact Layout					Pa	nel Cutou
4		42 •					JARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					ØA	<u>T_</u>
ω							Dim ØA ØAA R1 ØT	
	L							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wh / either of
N								Country FR
							PN: 80	00215
					A	03-11-2016 DATE	First Release Latest modification - by	
					Designed		Date:	
					I I	TITLE	Stainl	ess Ste
_					SCAL			al linear ances: ±
					SOL	WWW.SOURIA		IAU.C
					FORM/			RIAU 021S4
L	Н	G	F	E	D		C	

