

Image: Description of the second se	
CO LAYOUT Keying Shown as example	T SHOWN AS EXA
CHARACTERISTICS Connector dimension	
-Standard : Based on MIL-DTL-38999 Series III Shall Material Series Connection Series III	
Z' 31.5 Max SOURIAU shall not b -Shell Plating : Olive drab Cadmium VV THREAD M31x1-6g due to a use of th -Insulator : Thermoplastic the Specifications issue	ne Products which ed by either of th recommendation
 Contact Plating : Gold over copper Alloy 0.8μm minimum Durability : 500 Mating cycles 	Country FR : 8D521J4
-Temperature Range -65°C to +175°C -Salt Spray : 2000 hours -Mass : 35.3 g ± 10%	 yy
BASIC SERIES: 8D 5 - 21 J 41 P B	Composi General linear
	Tolerances: ±
	URIAU.CO
PLATING : J = Olive drab Cadmium CONTACT LAYOUT : 21-41 FORMAT SO	OURIAU E
	8D521J41
H G F E D C	

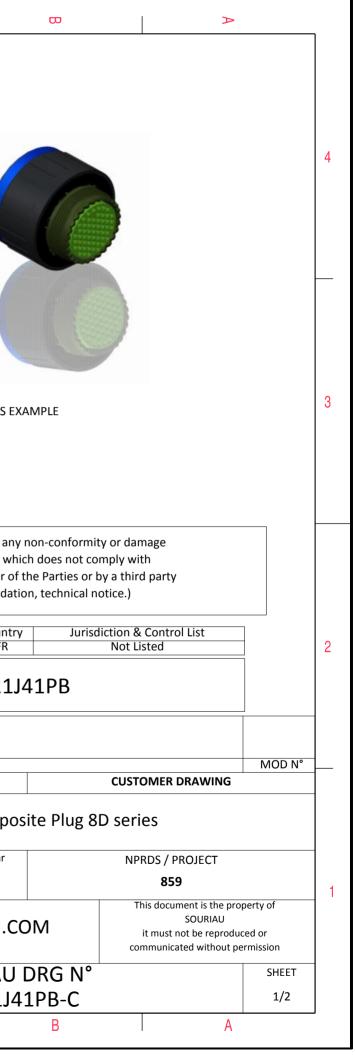

	т	۵	г	m	D	0
		Contact Layout				
4		- *Y				
	<	31" 23 31" 23 31" 24 31" 24 13 HOLES 10" - TO HOLES				
		A A A A A A A A A A A A A A A A A A A				
		300 Bia				
		835 D/A				
	Shell Arrangement Num size no. con	Insert arrangement 21-41 Iber of Size Service Contact Supersedes	7			
ယ	<u>size no. con</u> 21 -41 4	itacts contacts rating location 41 20 I All MS20055-41	3			
	_					SOURIAU shall not be liable for ar
						due to a use of the Products w the Specifications issued by either c (professional recommenda
						Count
N					[FR
						PN: 8D521
					A 07-10-20	16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Compo
					SCALE	General linear
<u> </u>					NA	Tolerances:
					SOURIA	U WWW.SOURIAU.
					FORMAT	SOURIAU
		<u> </u>	F	r i	A3	8D521J
	Н	G	l F	I E	D	C

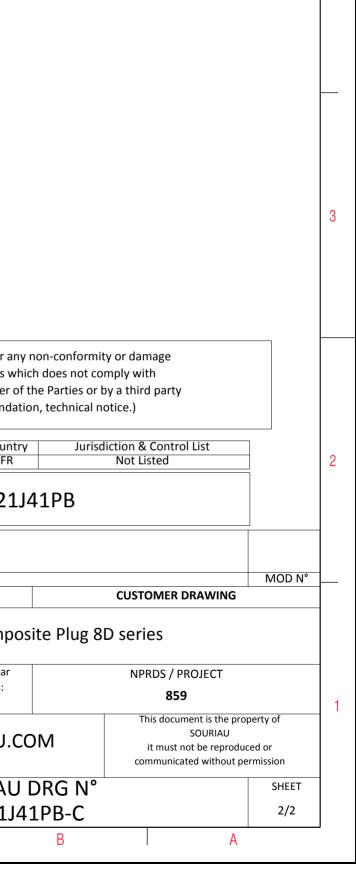

4